
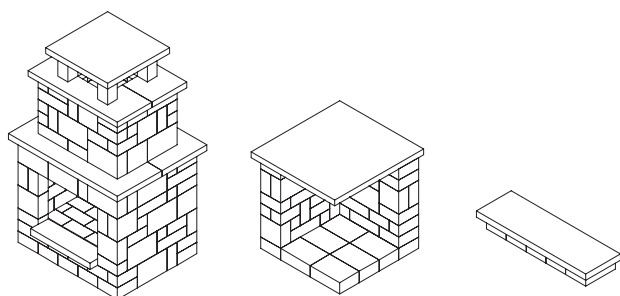



Assembly Instructions

COMPACT FIREPLACE, WOOD BOX AND HEARTH • 72" W x 44" D x 70" H

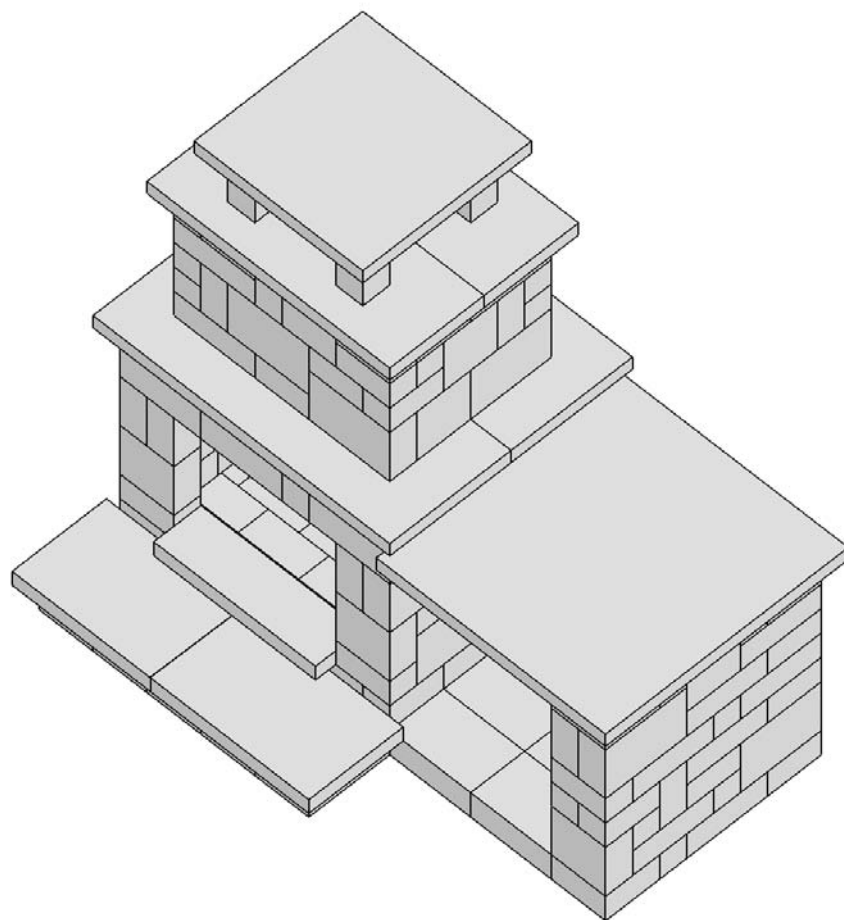

necessaries[™]
kits for outdoor living

ROCKWOOD[®]
RETAINING WALLS
A better way.[™]

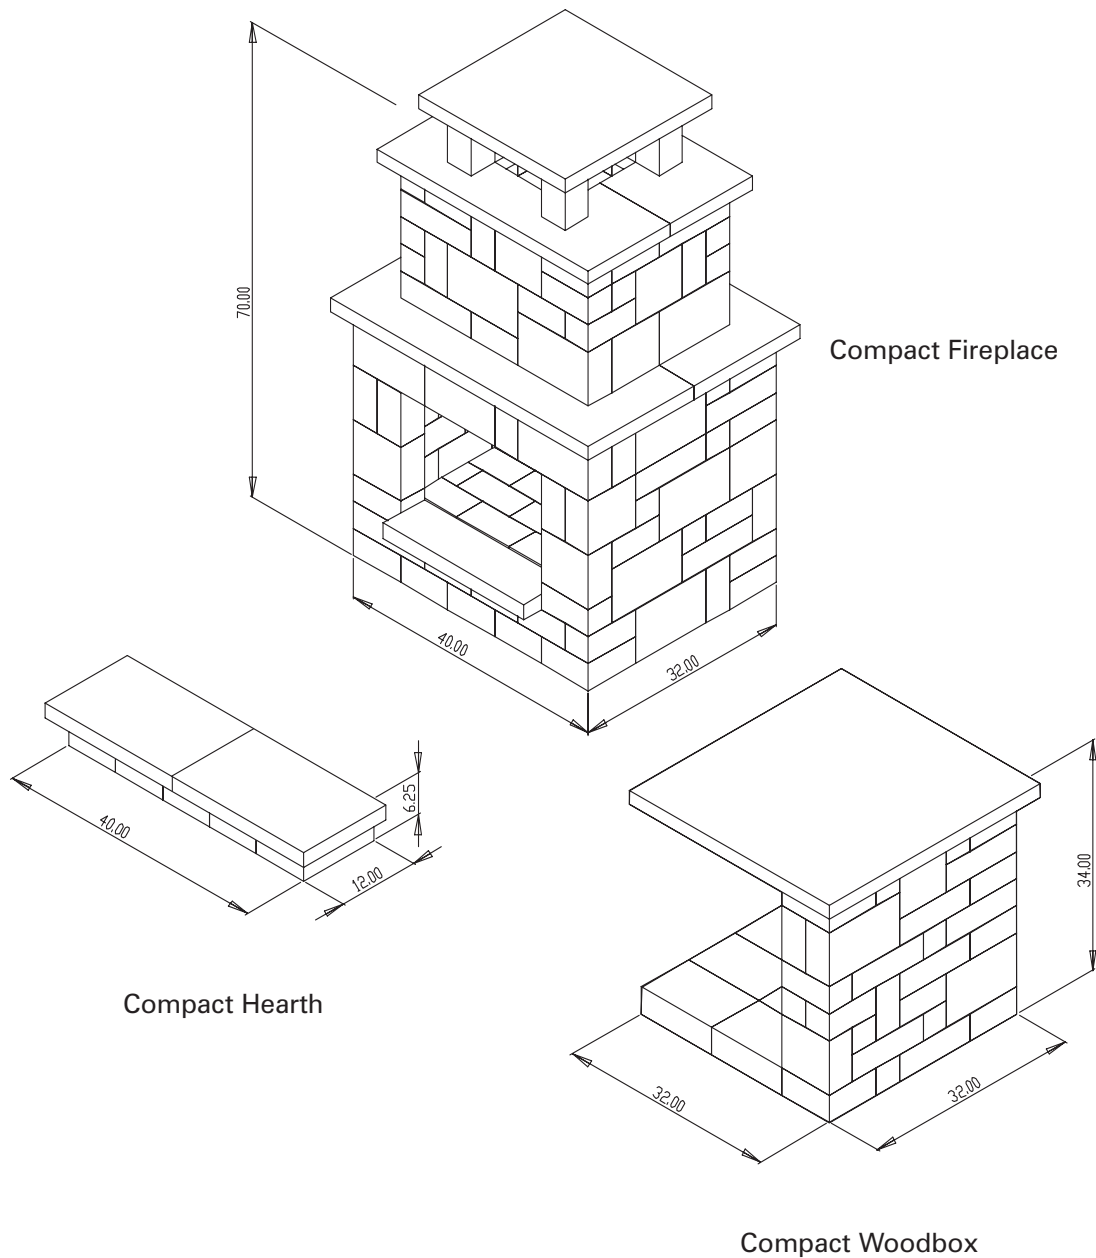

Copyright notice, please read:

The plans and instructions contained in this kit and the three-dimensional [Compact Fireplace, Woodbox and Hearth] design constructed from the use of this kit are protected under the U.S. Copyright Act. Reproduction of the plans, instructions or the [Compact Fireplace, Woodbox and Hearth] design, either in whole or in part, and whether in two-dimensional or three-dimensional form, and the creation of new works based upon such plans, instructions or [Compact Fireplace, Woodbox and Hearth] design, without the prior written permission of Rockwood Retaining Walls, Inc. is strictly prohibited. The purchase of a genuine kit from Rockwood Retaining Walls, Inc. or an authorized Rockwood dealer provides the purchaser with a limited license to construct a single [Compact Fireplace, Woodbox and Hearth]. Any reproduction of the plans and/or instructions, or the construction of more than a single [Compact Fireplace, Woodbox and Hearth] is a violation of Rockwood's copyrights and can result in severe penalties.

ROCKWOOD®
RETAINING WALLS

A better way.™

Visit us on the web at:
www.rockwoodwalls.com

Compact Fireplace Kit – Contents

<u>Item</u>	<u>Description</u>	<u>Quantity</u>
4 x 12 x 8"	Large Lakeland Block (L)	30
4 x 8 x 8"	Medium Lakeland Block (M)	52
4 x 4 x 8"	Small Lakeland Block (S)	45
4 x 4 x 12"	Lakeland Block cut (A)	14
4 x 4 x 4"	Lakeland Block cut (B)	14
4 x 4 x 8"	Lakeland Block cut (C)	2
Firebrick	Firebox Lining	51
Firebrick Mortar	Rutland, 10.3 oz. Tubes	3
18 x 44"	Mantle - Middle	2
14 x 36"	Mantle - Top	2
24 X 7"	Mantle - Firebox	1
25 x 25" Top	Spark Suppressor Top	1
Angle Iron	Support	1
Adhesive	29 oz. Tubes Adhesive	4


Compact Woodbox Kit – Contents

<u>Item</u>	<u>Description</u>	<u>Quantity</u>
4 x 12 x 8"	Large Lakeland Block (L)	28
4 x 8 x 8"	Medium Lakeland Block (M)	16
4 x 4 x 8"	Small Lakeland Block (S)	14
4 x 4 x 4"	Lakeland Block cut (B)	1
36 x 36"	Woodbox Top	1
Adhesive	29 oz. Tubes Adhesive	2


Compact Hearth Kit – Contents

<u>Item</u>	<u>Description</u>	<u>Quantity</u>
4 x 12 x 8"	Large Lakeland Block (L)	2
4 x 8 x 8"	Medium Lakeland Block (M)	1
4 x 4 x 8"	Small Lakeland Block (S)	2
43 x 14" Top	Hearth Top	1
Adhesive	29 oz. Tube Adhesive	1


Lakeland™ blocks have the sophisticated look of an old brick wall so popular with homeowners today. This tumbled, three piece system offers designers the opportunity and freedom to combine functionality with style. Lakeland blocks can be used to build random-pattern outdoor fireplaces, kitchens, islands, garden and seat walls, pillars, planters, and more.



Large Block
Size: 4" H x 8" W x 12" D
Weight: 31 lbs



Medium Block
Size: 4" H x 8" W x 8" D
Weight: 20 lbs.



Small Block
Size: 4" H x 4" W x 8" D
Weight: 10 lbs.


Base Preparation: Base can be constructed of either poured slab or compacted gravel. See requirements below.

Zoning and Permits: Before you plan your project, learn about the necessary zoning requirements and rules for excavating and building in your area. No matter how small your project, be sure you obtain the necessary permits before you start construction.

Know What's Below: Whether you are planning to do it yourself or hire a professional, smart digging means calling 811 before each job. Homeowners often make risky assumptions about whether or not they should get their utility lines marked, but every digging job requires a call – even small projects like planting trees and shrubs.




**Know what's below.
Call before you dig.**

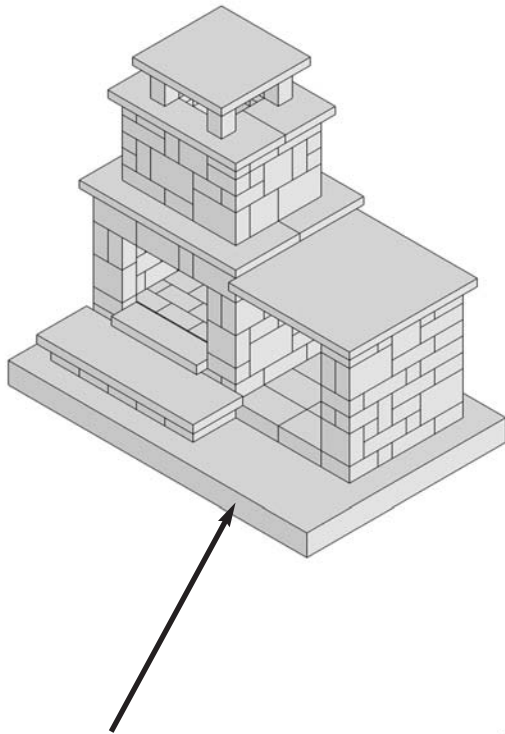

Concrete Base Foundation:

- 4" deep
- 4" outside perimeter of base
- Reinforce with 6" x 6" no. 10 WWM
- Compact sub-base soils to 95% of standard proctor (ASTM D698)

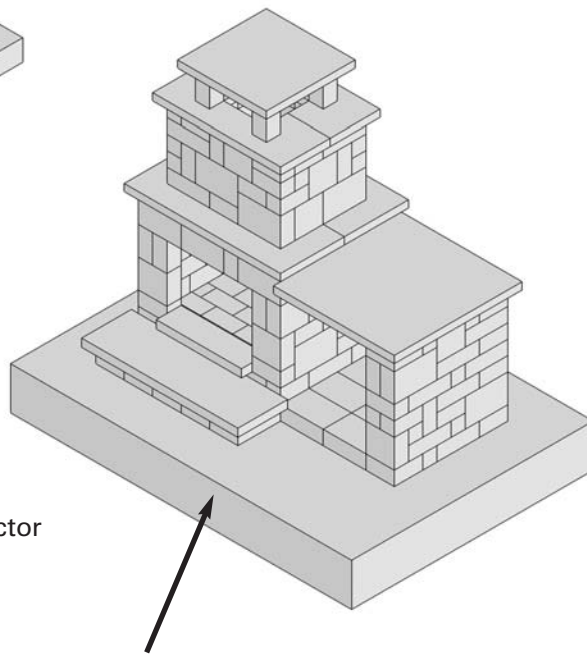

Aggregate Base Foundation:

- 6" deep
- 8" outside perimeter of base
- Compact sub-base soils to 95% of standard proctor
- Compact aggregate base to 95% of standard proctor (ASTM D698)


Course 1

Be sure your properly prepared base is level. Begin building by laying your base course as shown.

Using a stiff brush, remove all debris and dust from each block surface to be glued.


IMPORTANT: Lay glue bead away from outside perimeter to prevent glue from squeezing out between courses

First course for optional hearth.

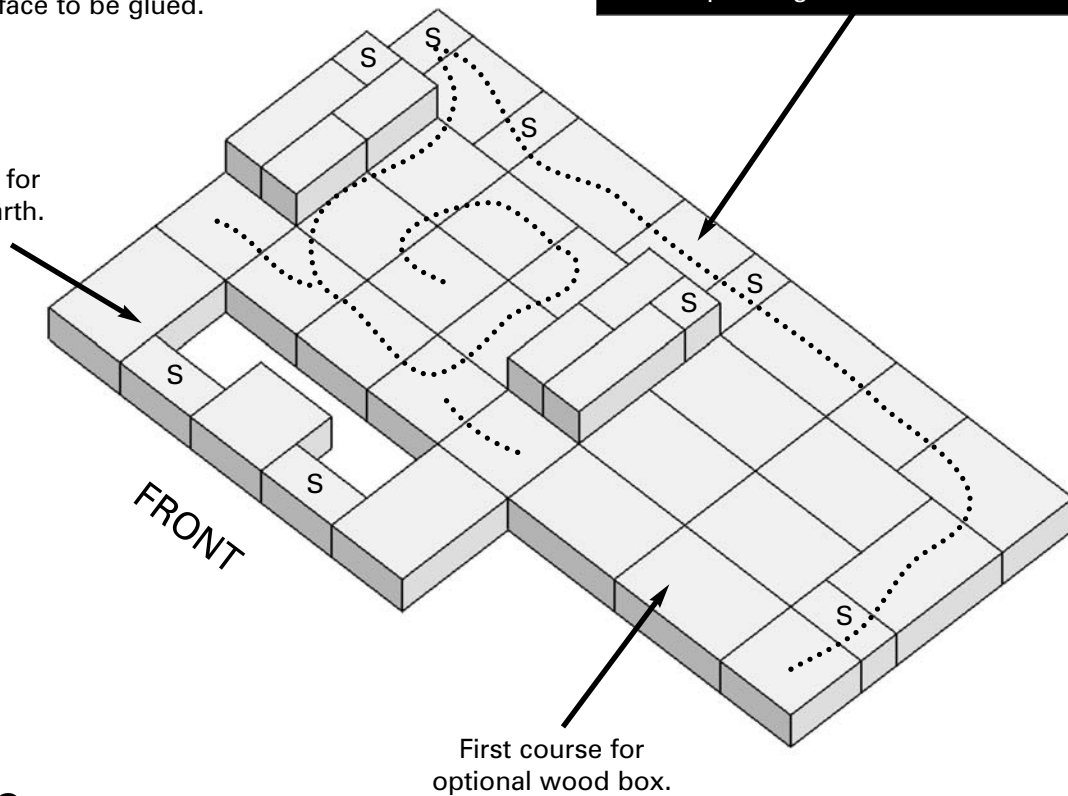


Course 2

Continue to build each course as shown. Use adhesive on each block.

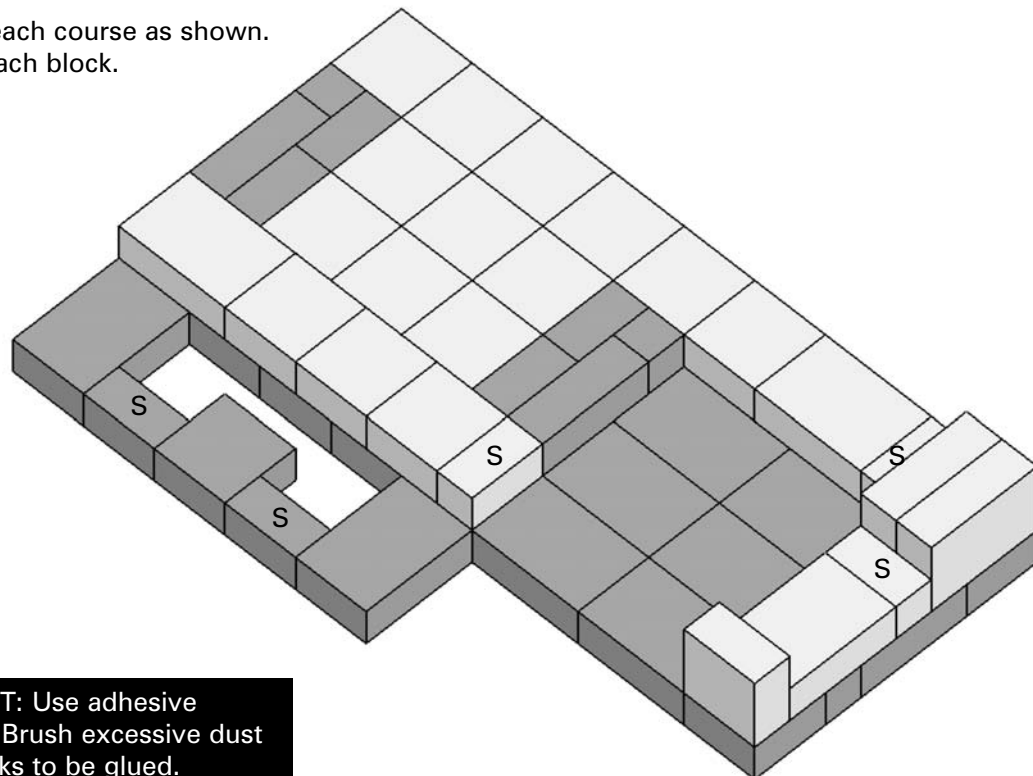


IMPORTANT: Use adhesive on each course. Brush excessive dust from blocks to be glued.

Course 3

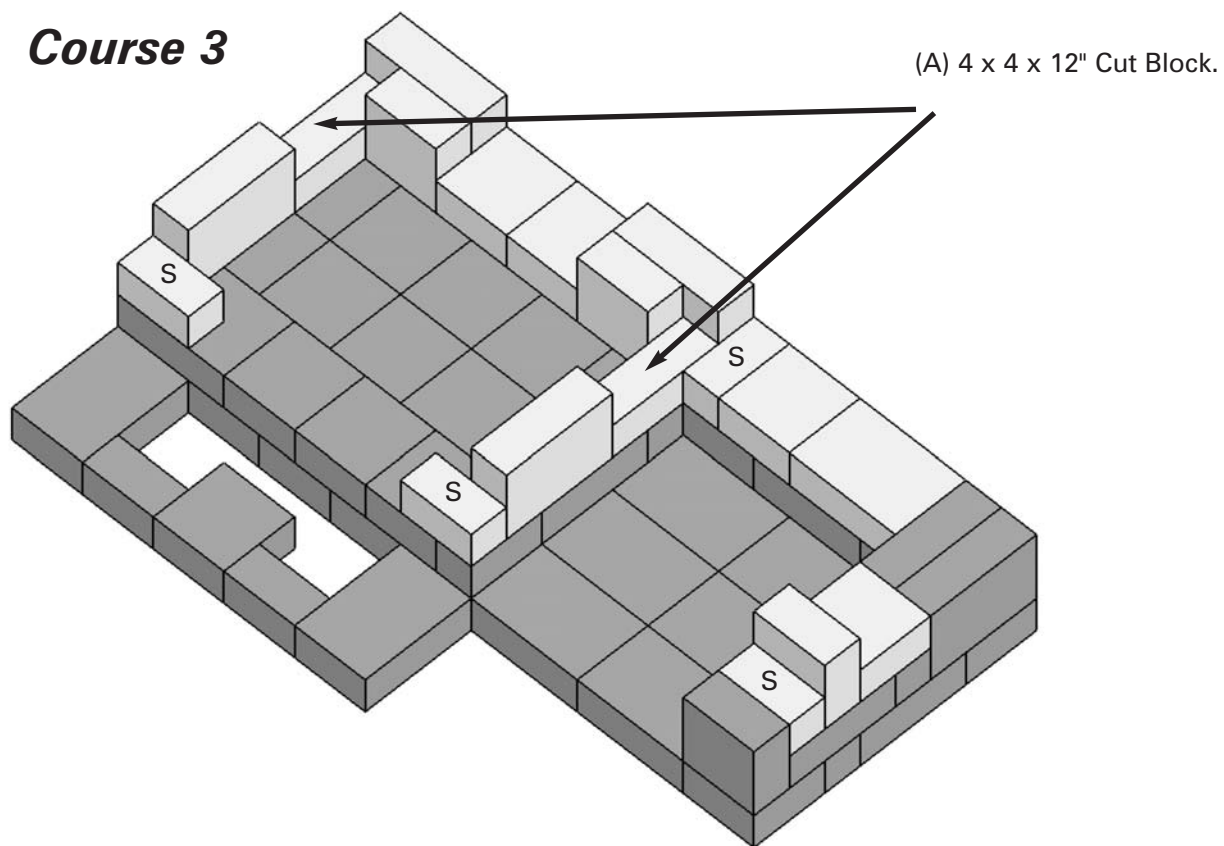


Course 4

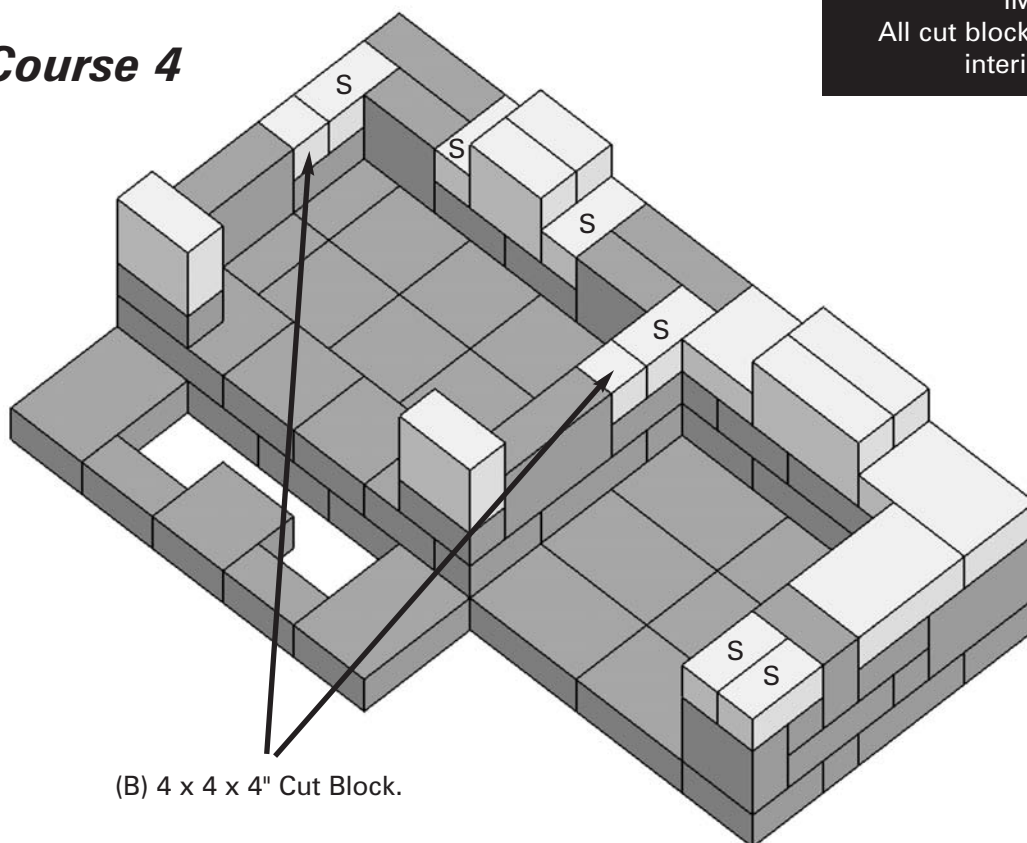


IMPORTANT:
All cut block surfaces should face
interior of fireplace.


Course 5

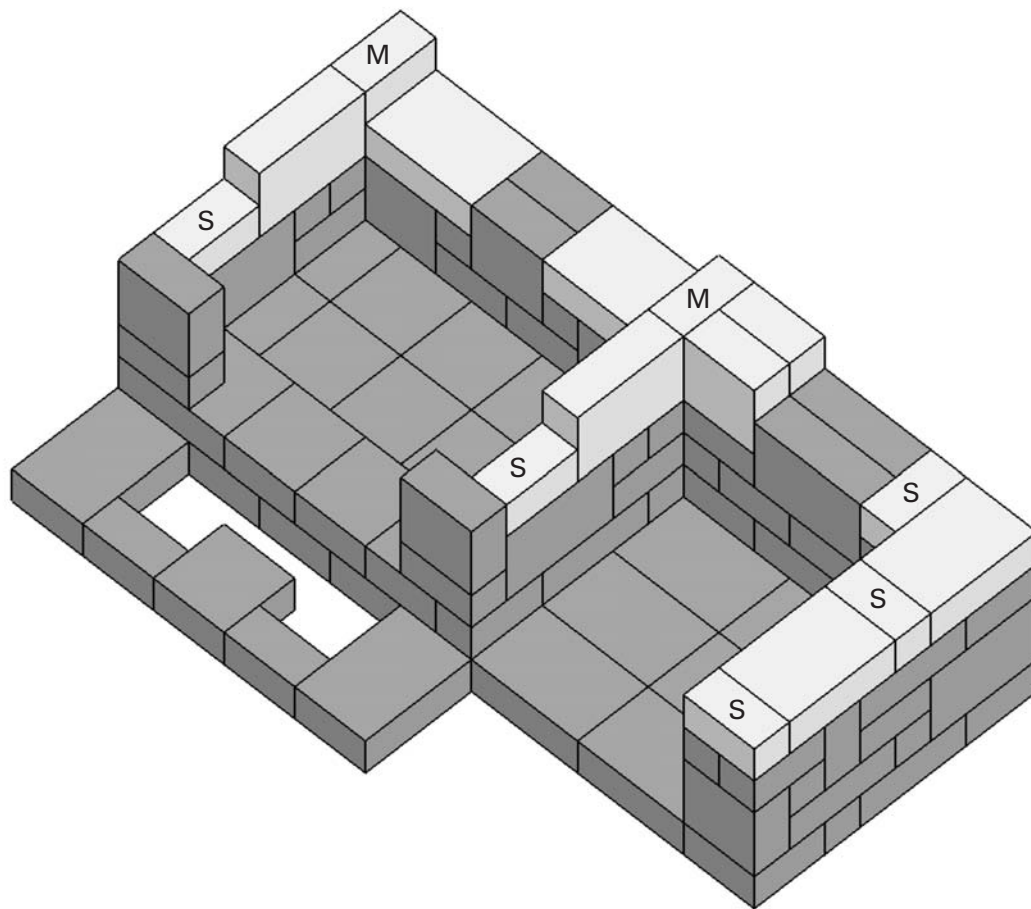


Course 6

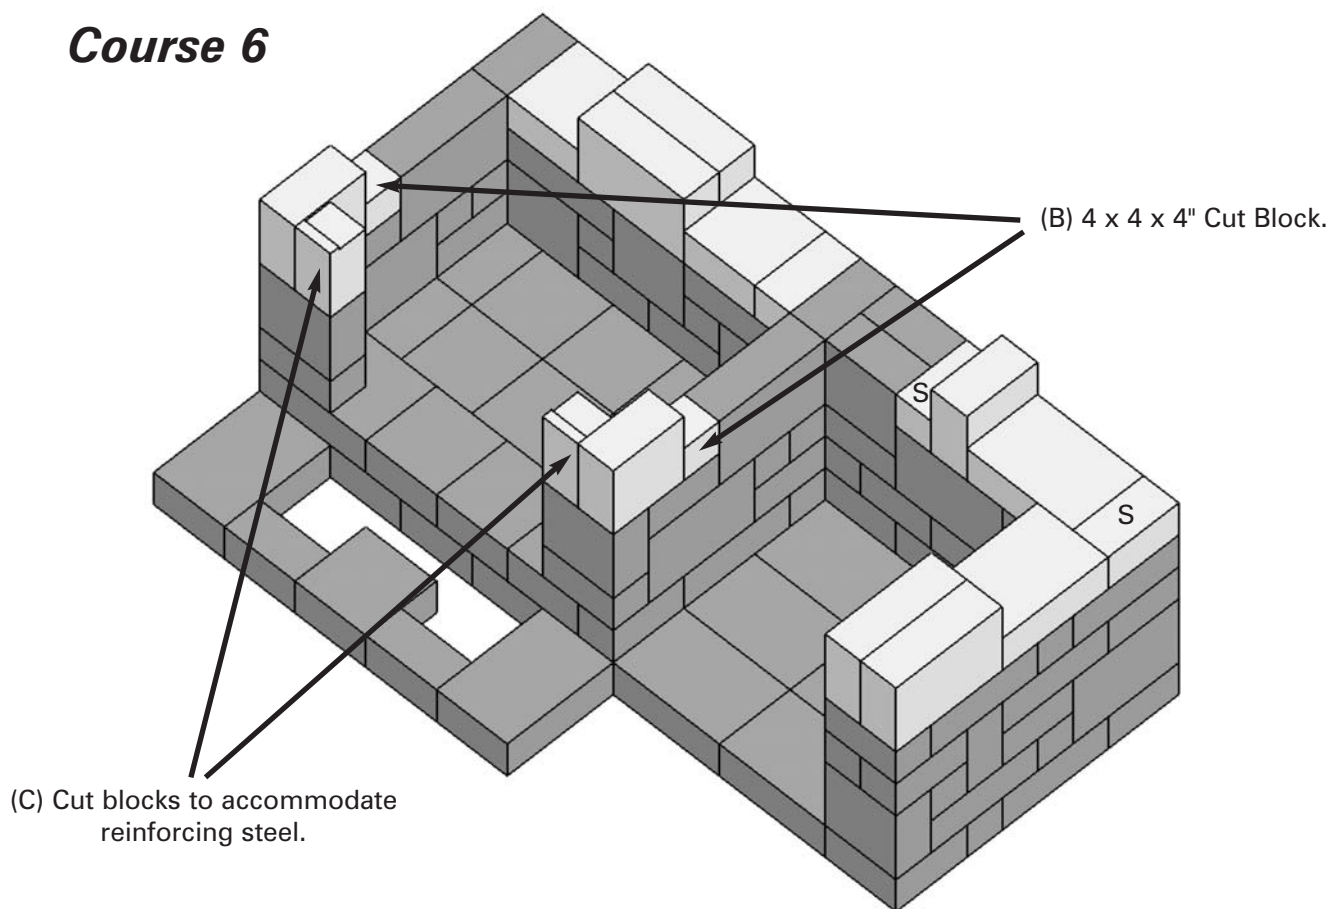

Course 7

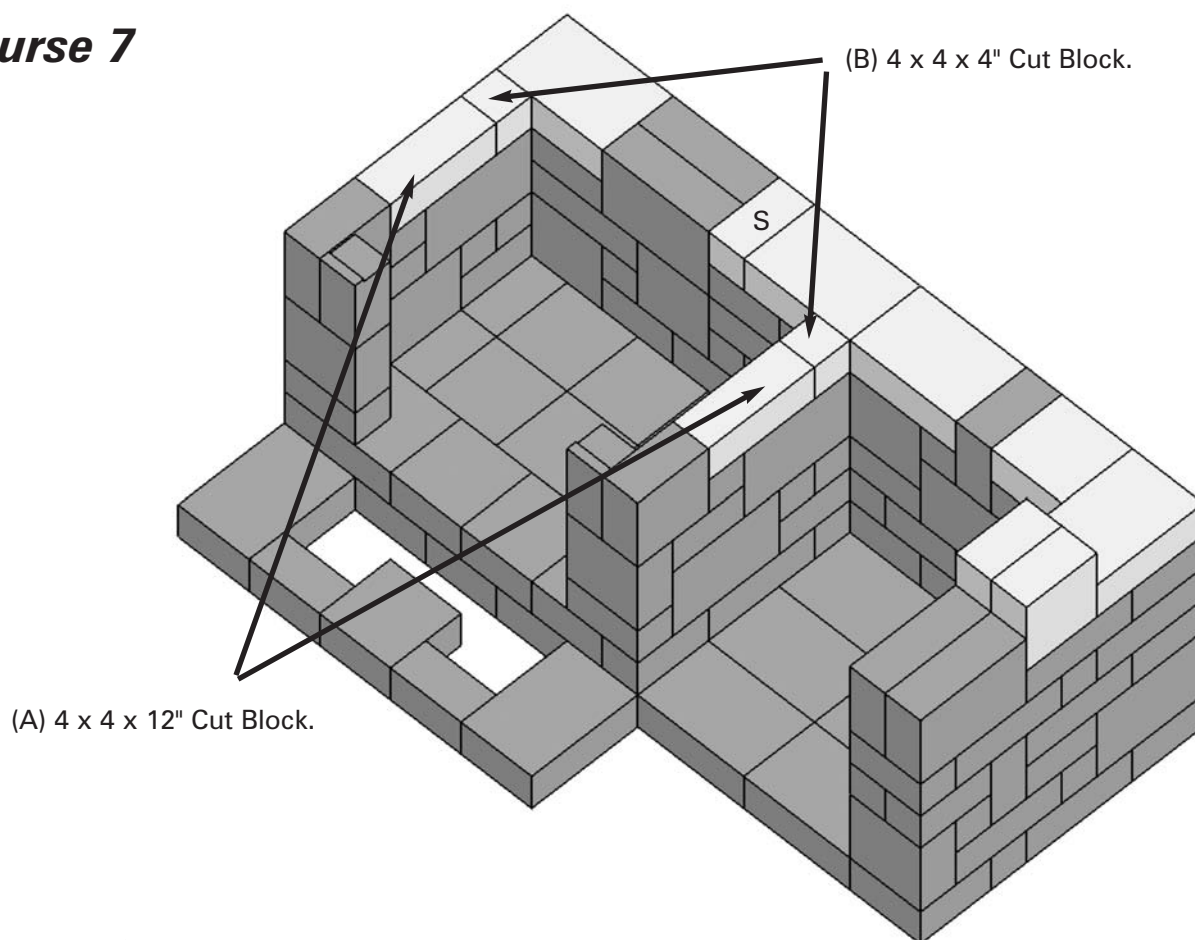


Course 8

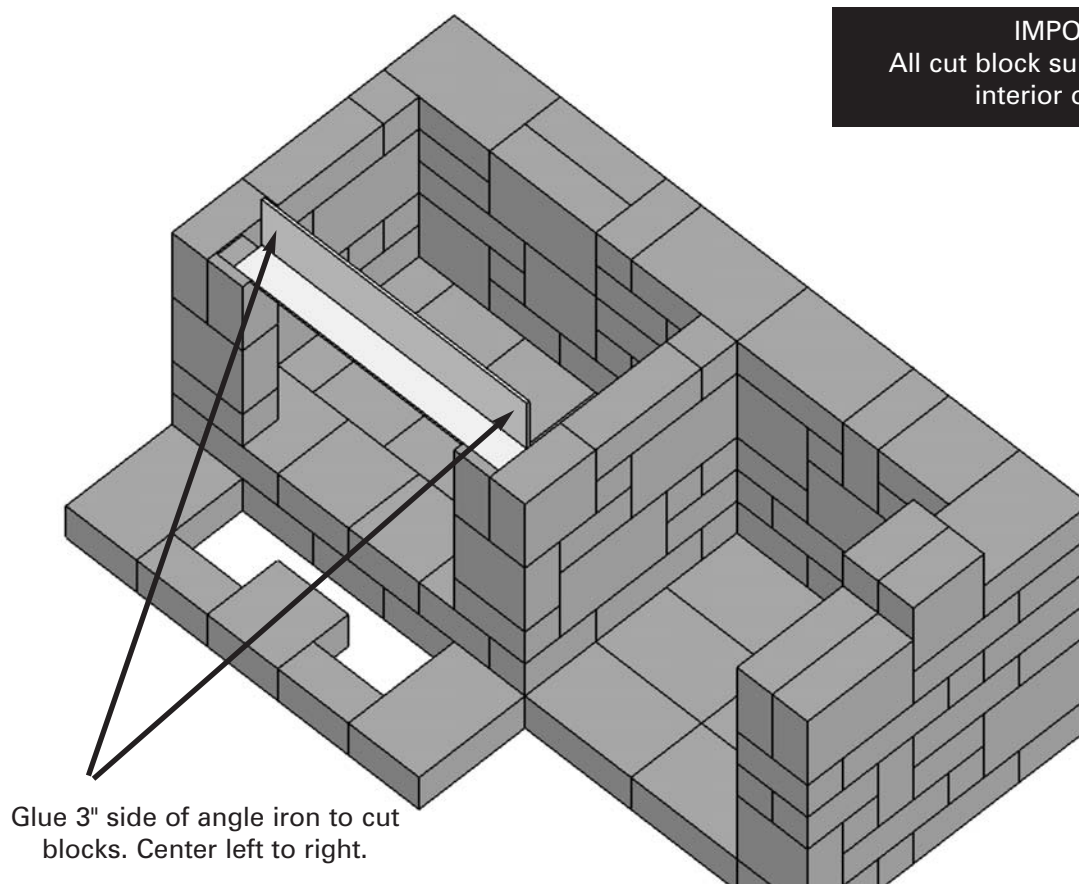


IMPORTANT:
All cut block surfaces should face interior of fireplace.


Course 9

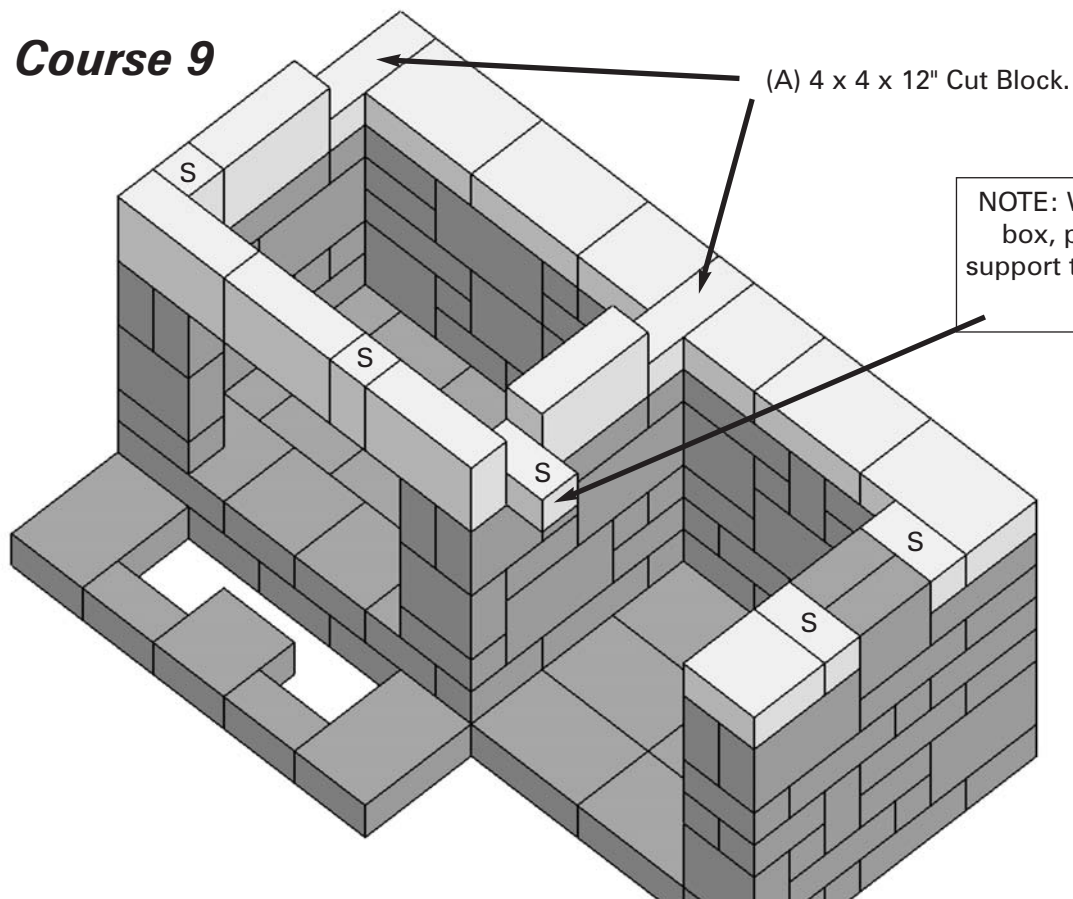

Course 10

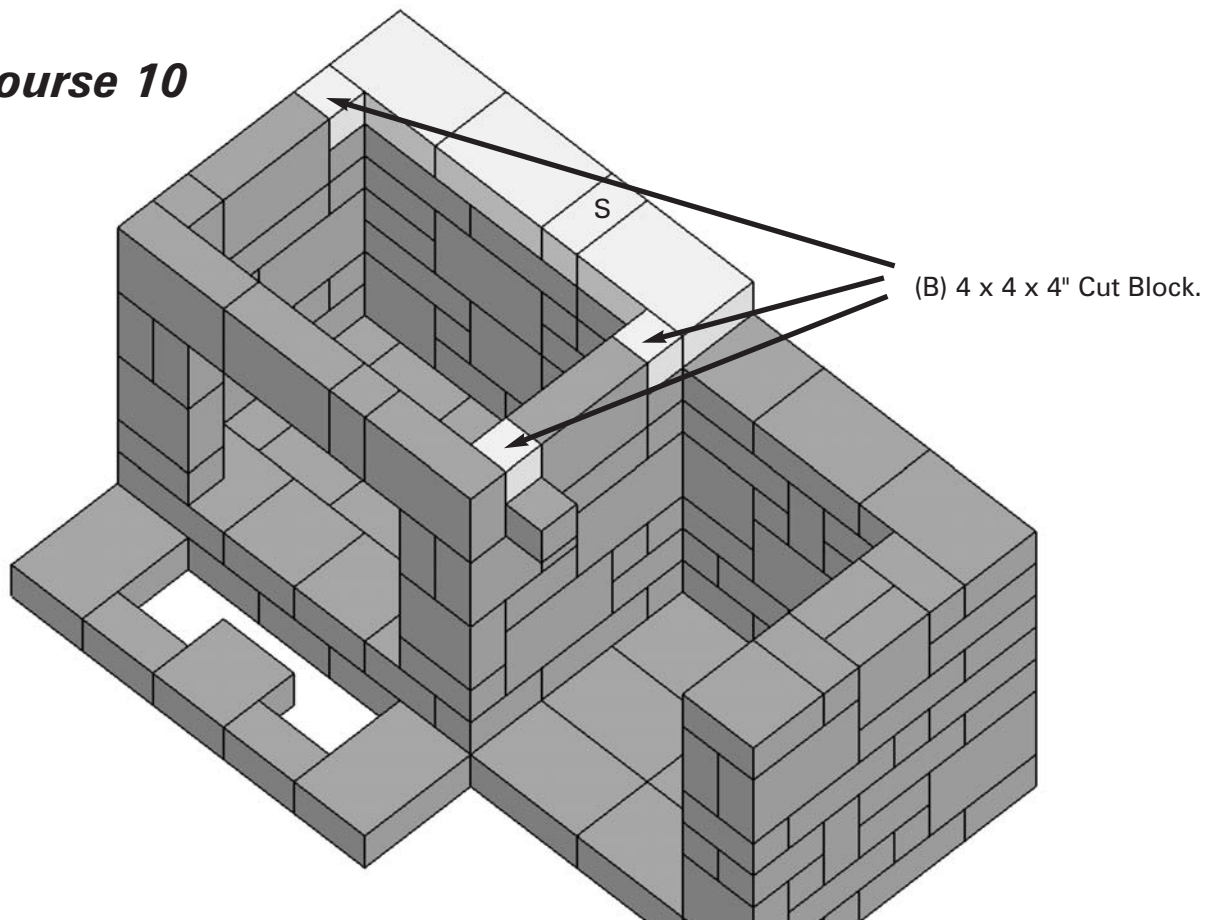

Installing Firebrick



Install fire brick now.

Rutland fireplace mortar (furnished) is a silicate product that when fire cured, sets rock hard - as strong as firebrick itself and withstands 2,000°F. Passes ASTM E136 and E72.


Step #1: Start by applying a bead of firebrick mortar to the bottom of a brick. Begin at the bottom of the fireplace. Place a full brick in the front left corner and end with a half brick on the right side. Continue to install by placing mortared bricks edge to edge (no joint) as shown. When you finish the bottom of the firebox, there will be a small gap between the fire brick and the back wall.

Step #2: Next, install the fire brick in the same manner to the back wall as shown. Set first course on top of fire brick on floor.


Steps #3 and 4: Install the fire brick on the two remaining sides as shown. Note, there are two cut firebricks to accommodate the angle iron support.

Finish: You will need enough mortar to install the trim piece for the front of the firebox. **DO NOT** use firebrick mortar to grout any gaps.


CURING FIREBRICK MORTAR: Protect new mortar from direct water contact until fired. Air dry for 24 hours, but no longer than 30 days. Start a low fire, keeping the temperature below 220°F until mortar has dried thoroughly. Then increase heat for the final cure. Heat for 1-2 hours at 500°F.

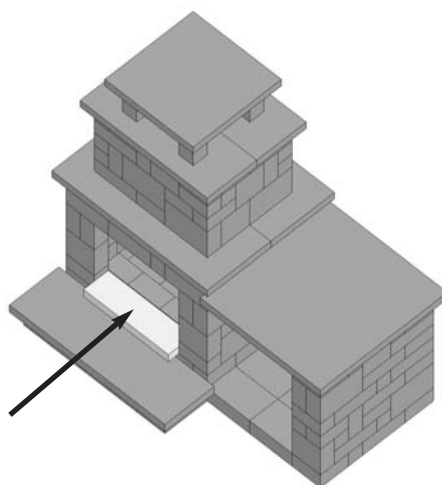


Step #1

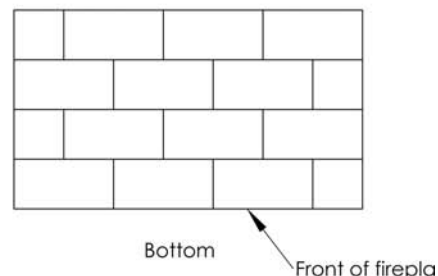


Step #2

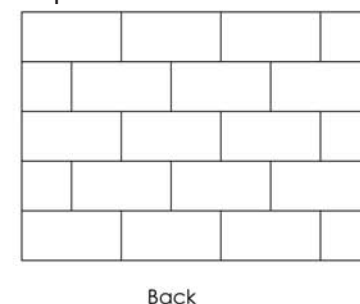

Step #3




Step #4



**DO NOT USE SUPER-STIK ADHESIVE
TO INSTALL FIREBRICK.**


Course 11

Place and center 18 x 44" Silver Creek
Limestone Tops as shown.
Lift to glue in place.

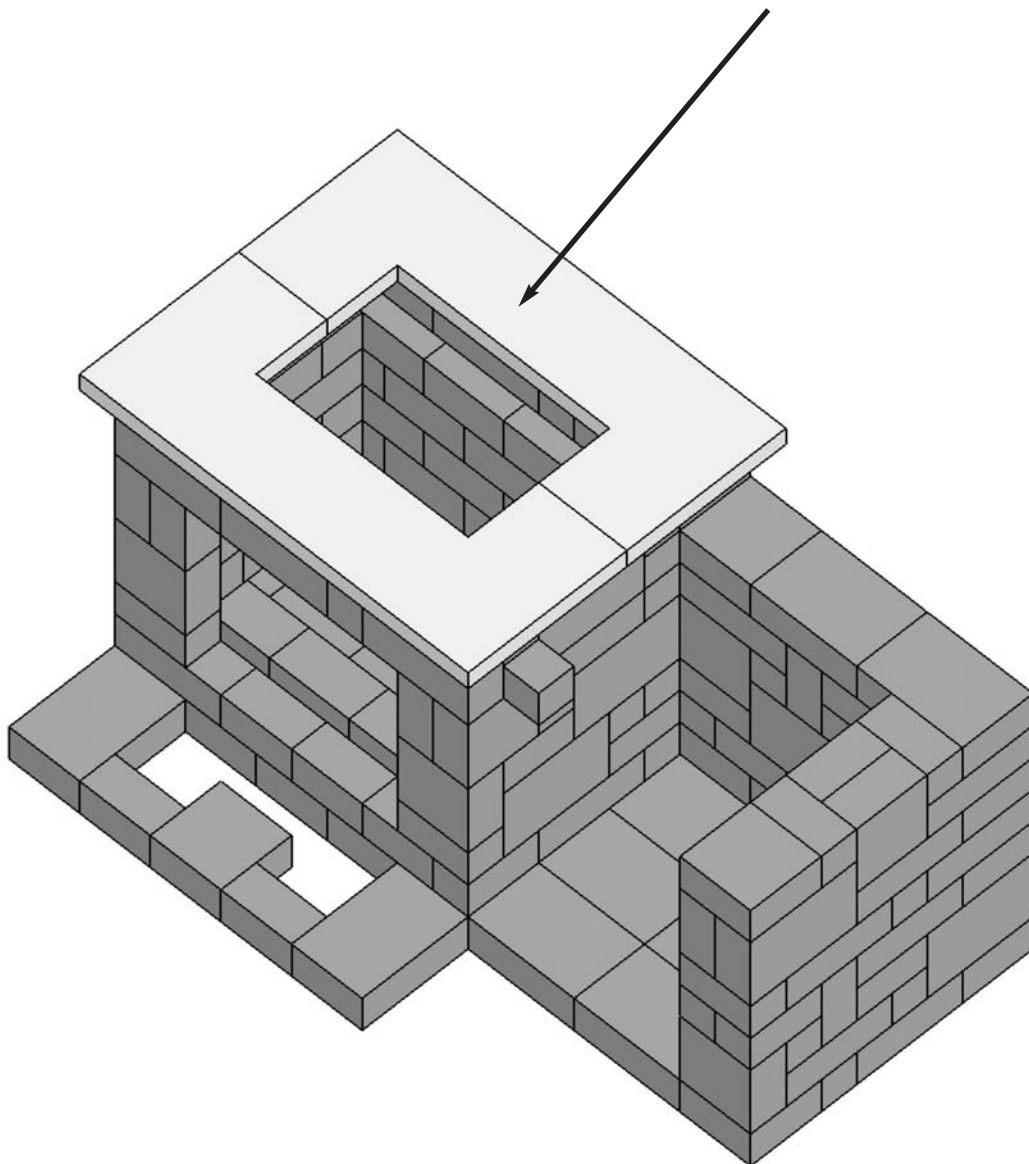

Course 12

Position course as shown.
Lift each block to glue in place.

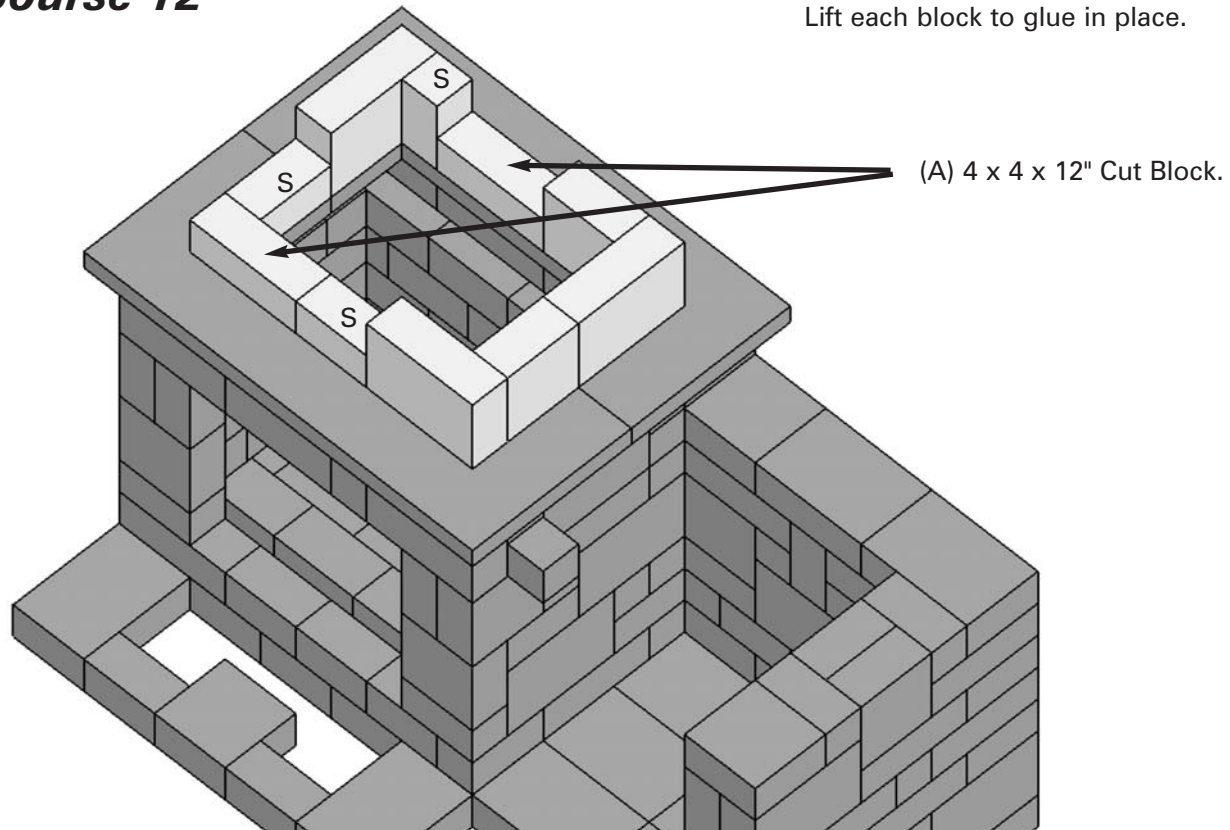


Course 13


(A) 4 x 4 x 12" Cut Block

IMPORTANT:
All cut block surfaces should face
interior of fireplace.


(B) 4 x 4 x 4" Cut Block.

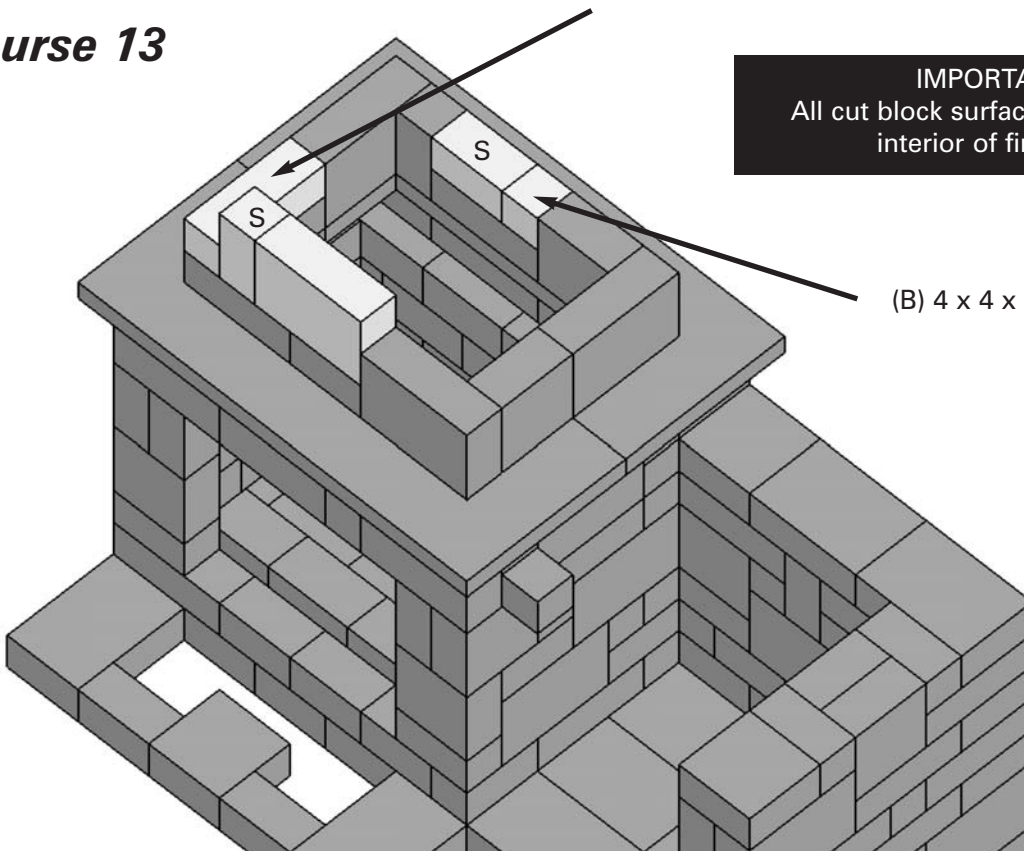


Course 14

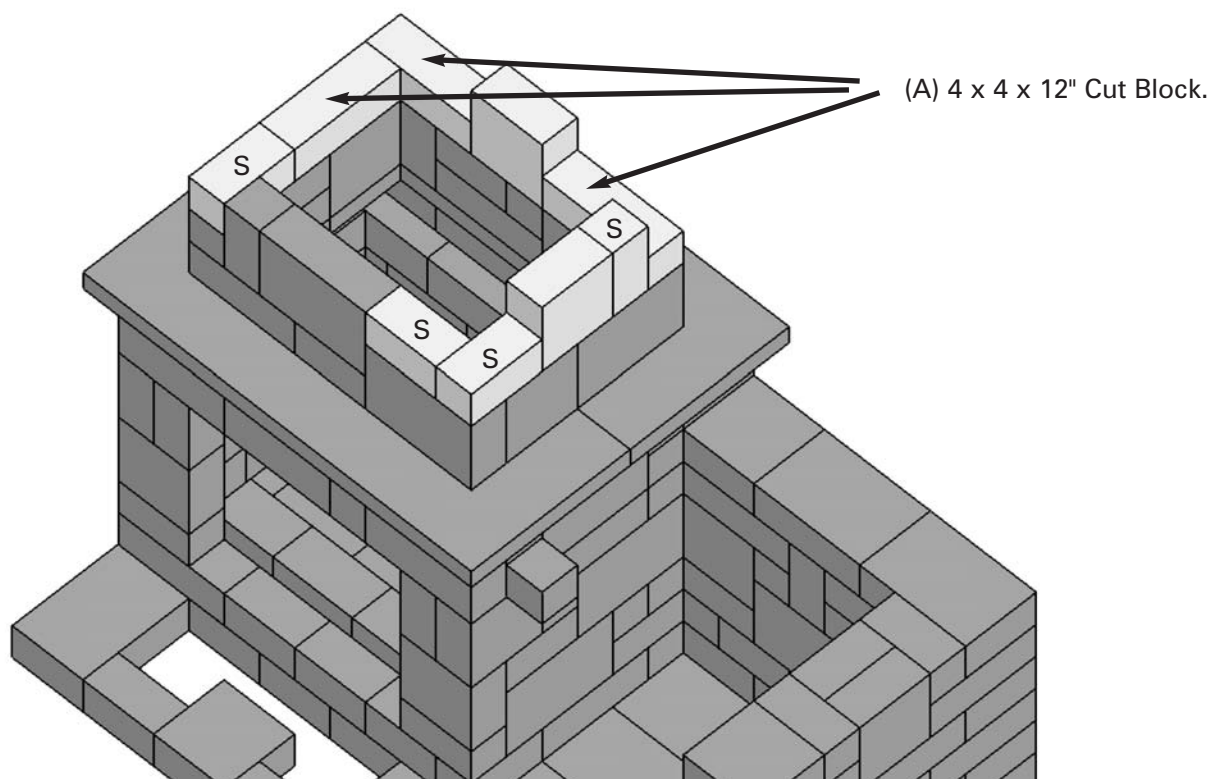

Course 15

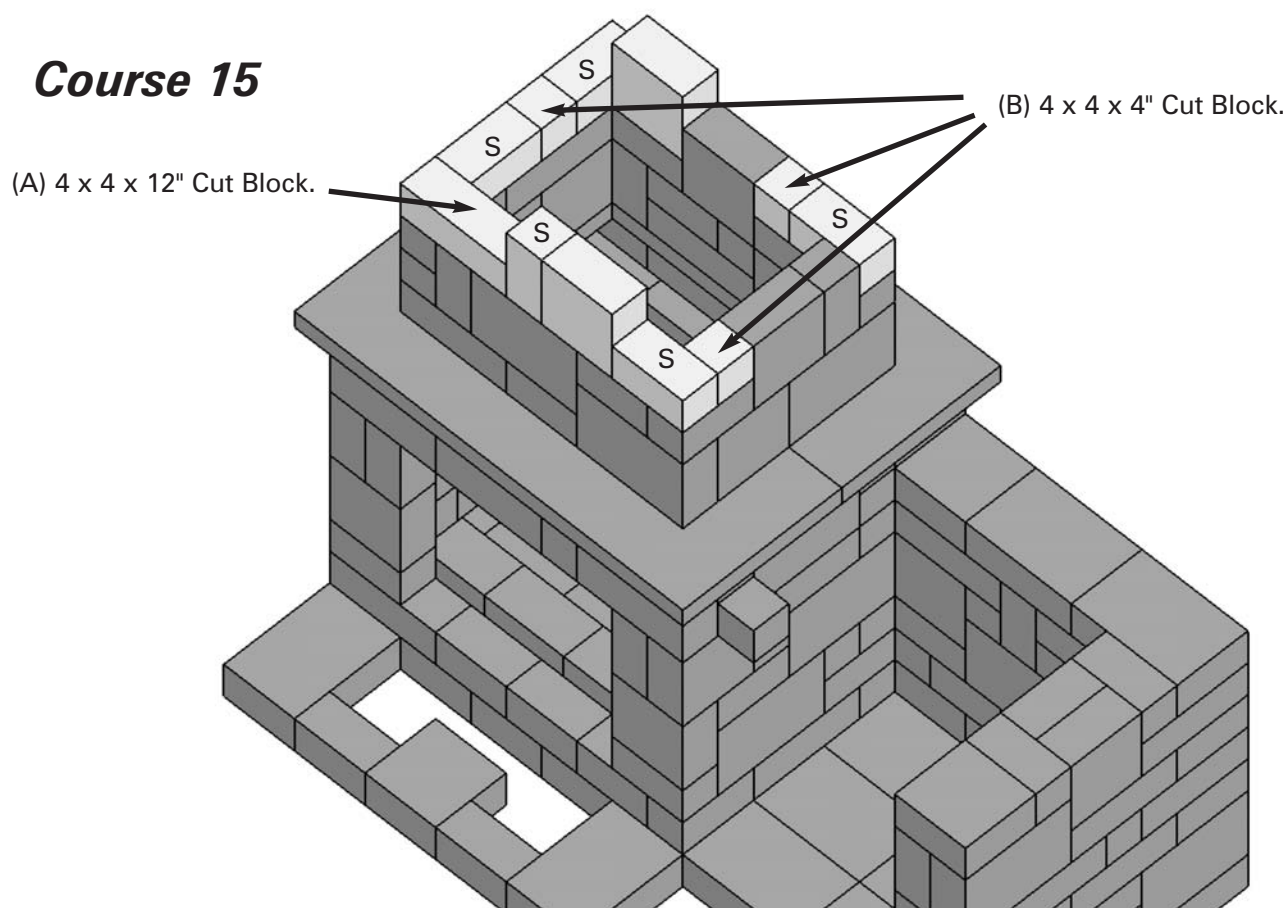


Course 16

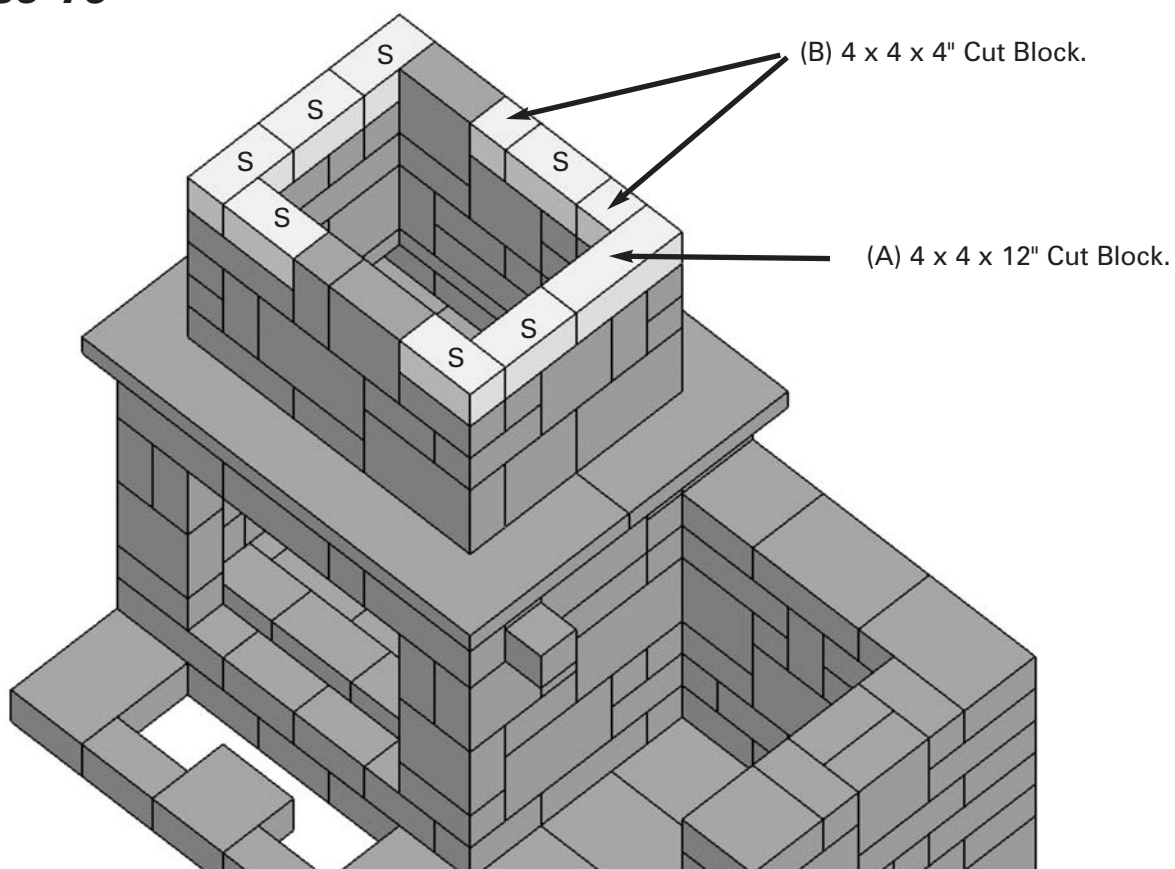

Course 17


IMPORTANT:
All cut block surfaces should face
interior of fireplace.

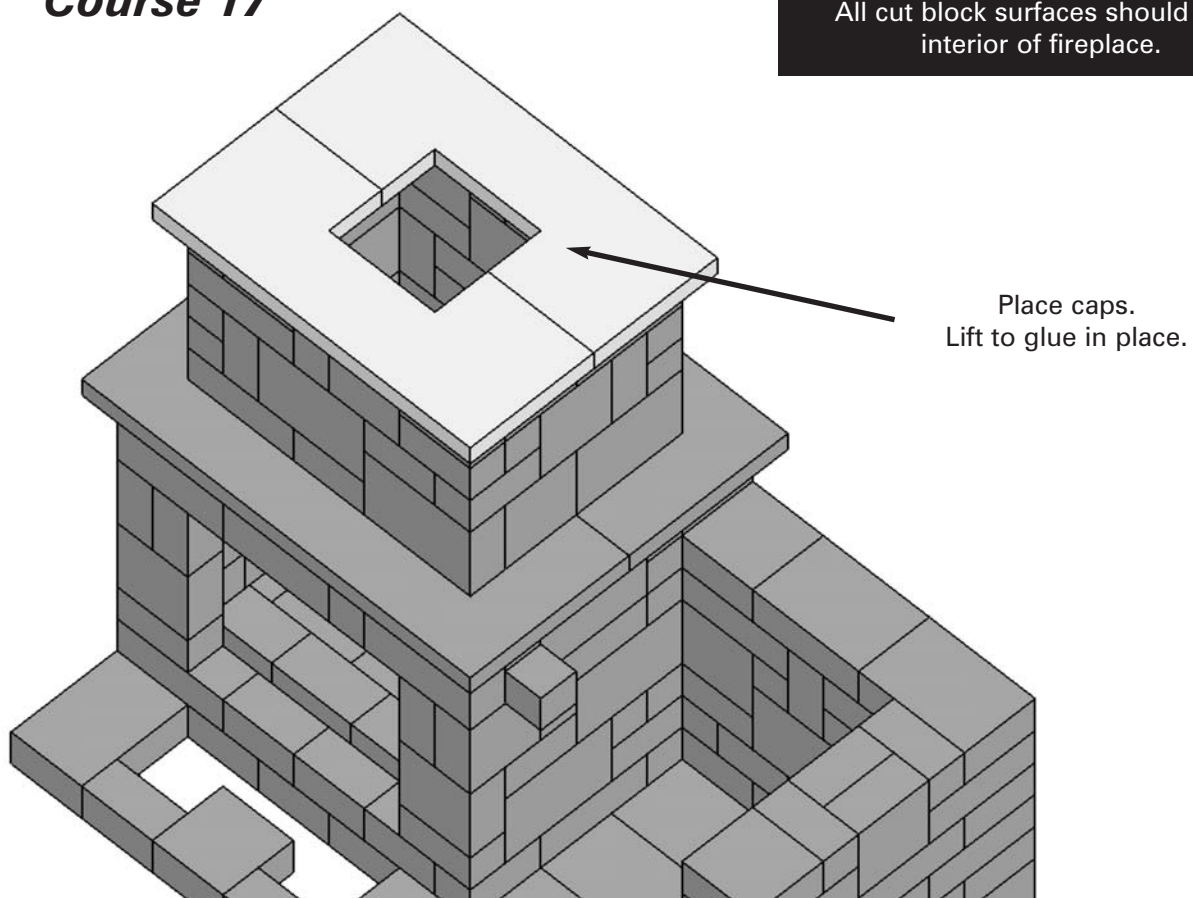


Course 18




Allow glue to set on support blocks before placing spark suppressor cap.

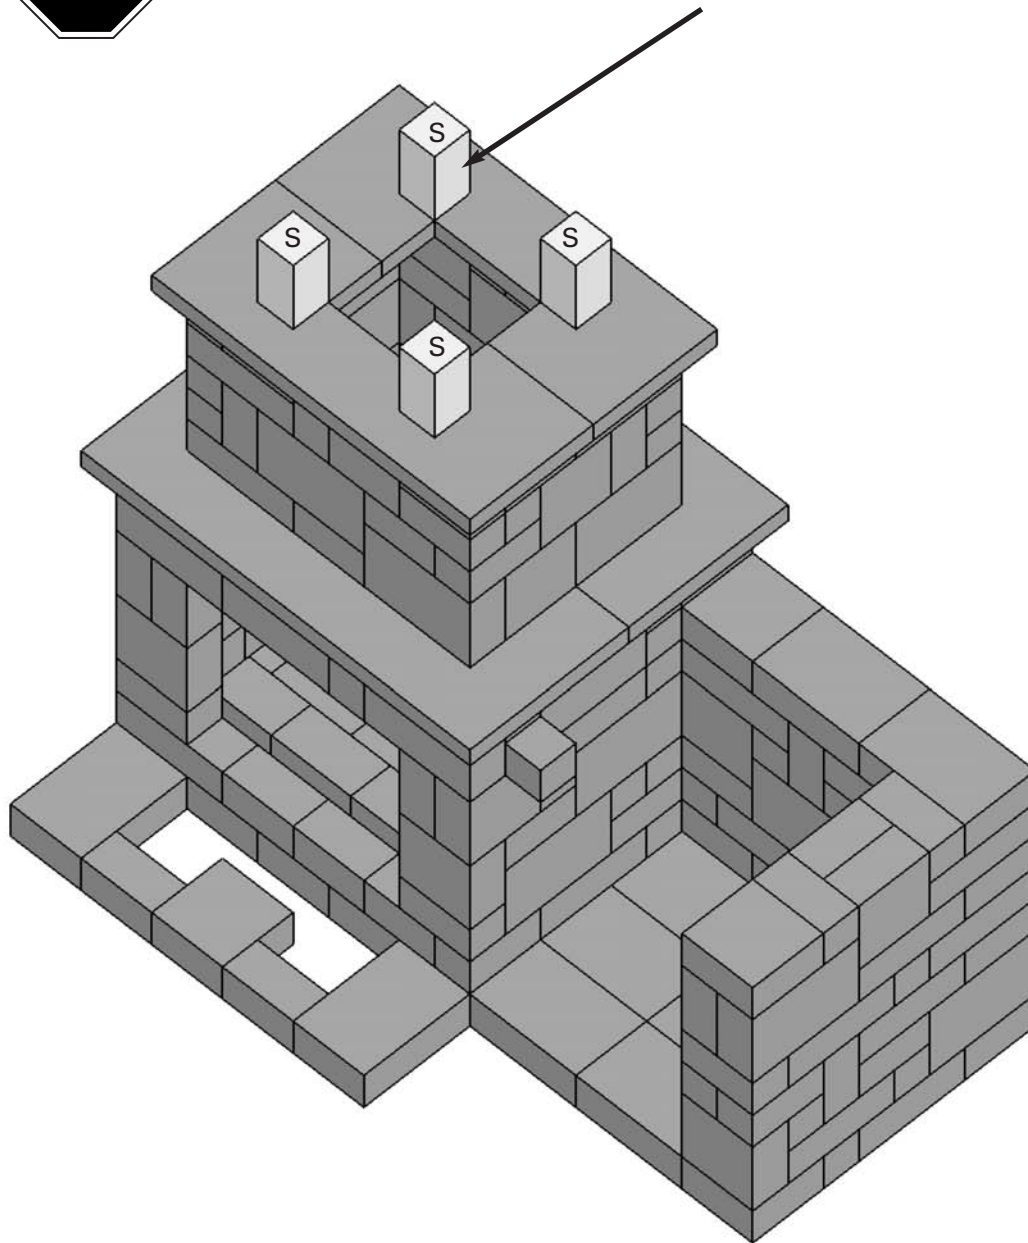

Final Steps

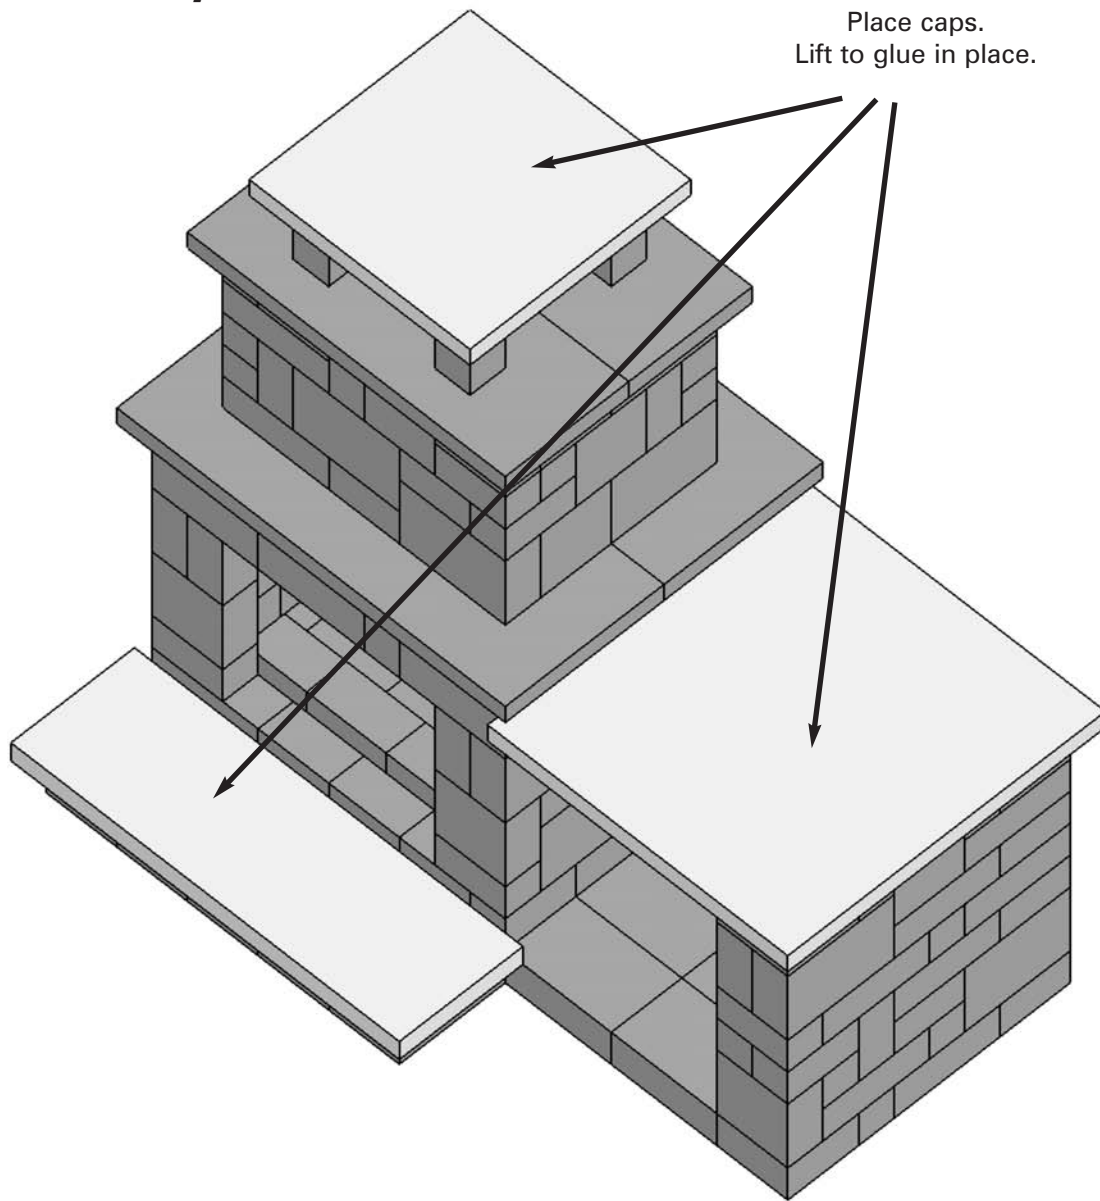


Secure fire box mantle in place with fire brick mortar. Do not use mortar to fill any gaps.

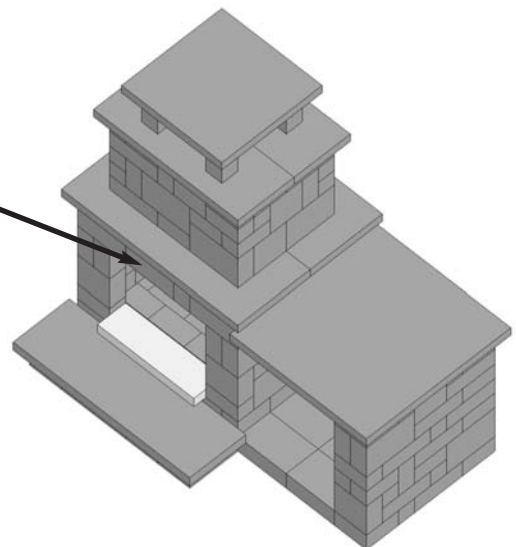


Allow 72 hrs. for adhesive to set before use.

Necessaries Outdoor Living Kits


Kit specifications, style and availability are subject to change without notice.




Compact Woodbox
\$850 msrp




Compact Hearth
\$255 msrp




Compact Fireplace
\$1,990 msrp



Grand Woodbox
\$1,300 msrp





Grand Hearth
\$700 msrp

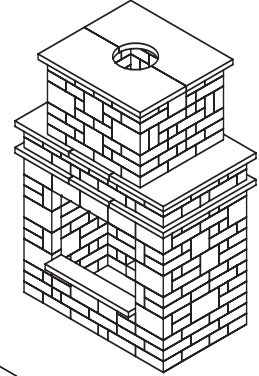



Grand Fireplace
\$7,000 msrp

Grand Island Bar
\$2,500 msrp




– Grand Island Bar/Grill Series –
Includes Vermont Castings Grill
\$5,290 msrp


(A) with storage and stainless steel door
or
(B) with storage, stainless steel door and
refrigerator opening




Grill Surround
\$1,995 msrp




Corner Return
\$2,500 msrp




Bar Section 4'
\$1,495 msrp




Dining Table
\$1,195 msrp




High Top Table
\$900 msrp




Compact Bar w/20" Opening
\$995 msrp




Compact Bar
\$995 msrp



Pub Table
\$600 msrp



Bistro Table
\$600 msrp




24" Pillar
\$590 msrp




20" Pillar w/Glass
\$710 msrp




20" Pillar
\$420 msrp




Riverland Seatwall (8' radius)
\$350 msrp




Lakeland Seatwall
\$350 msrp



**Limestone and
Slate Patio Kits: \$558 msrp**



**Octant Kit, \$365 msrp
Expansion Kit, \$337 msrp**




**Fire Ring and Insert, \$510 msrp
W/Optional Cooking Grate, \$600 msrp**



Assembly Instructions

COMPACT FIREPLACE • 72" W x 44" D x 70" H

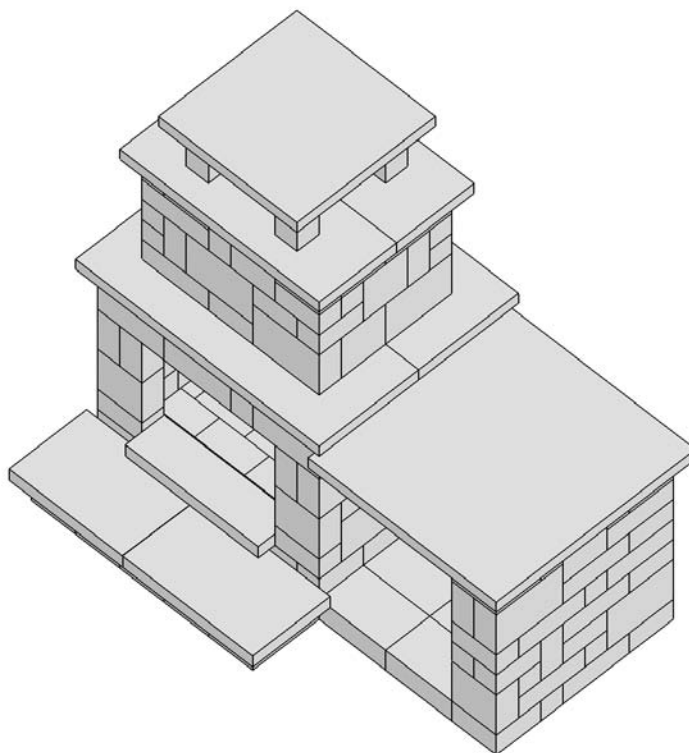

ROCKWOOD[®]
RETAINING WALLS
A better way.[™]

325 Alliance Place NE
Rochester, MN 55906

toll free

888.288.4045

phone

507.529.2871

fax

507.529.2879

www.rockwoodwalls.com

Available at: _____

© 2010 Rockwood Retaining Walls, Inc. All Rights Reserved. Made worldwide under license from Rockwood Retaining Walls, Inc. US and international patents issued and pending. This information has been prepared for the benefit of customers interested in Rockwood Retaining Wall products. It was reviewed carefully prior to publication. Rockwood assumes no liability for its accuracy or completeness. Final determination of the suitability of any information or material for the use contemplated, or for its manner of use, is the sole responsibility of the user. 811

