



ART THATCH™

WWW.ARTIFICIALTHATCH.COM

Backyard X-Scapes, Inc.
10835 Sorrento Valley Rd.
San Diego, CA 92121
Phone: (858) 643-9030
www.artificialthatch.com
sales@artthatch.com

Easy Installation!

- ▶ Ideal for installation on all solid roof designs.
- ▶ Realistic, artificial palm thatch panels conform and adjust to any custom roof design.
- ▶ Install our Baja Palm™ Top Cone (sold separately) on any custom roof peak.



Baja Palm™ 3-Layer Thatch Sub-Panel

Specifications

- Length: 31"
- Height: 24"

Standard Roof

- Coverage: 1.72 Sq. Ft.
- Center Installation: 8"

Round or Circular Roof


- Coverage: 1.5 Sq. Ft.
- Center Installation: 7"



Baja Palm™ 3-Layer Thatch Sub-Panel Installation Tips


Waterproof Installation

- On a solid roof, panels are not visible from underneath.
- Best to use 30 degree roof pitch.
- Use waterproof underlayment under panels.
- Attach with galvanized or stainless screws, roofing nails or pneumatic staples.
- First row of panels should overhang the bottom or eave about 12-16".
- On any roof design with a visible edge on the side (eave), install the second row 2" above the first. This creates a fuller, more aesthetic look on all linear eave surfaces.
- Cut with razor knife or saw (hacksaw, jigsaw, sawzall) with an 18 TPI blade.

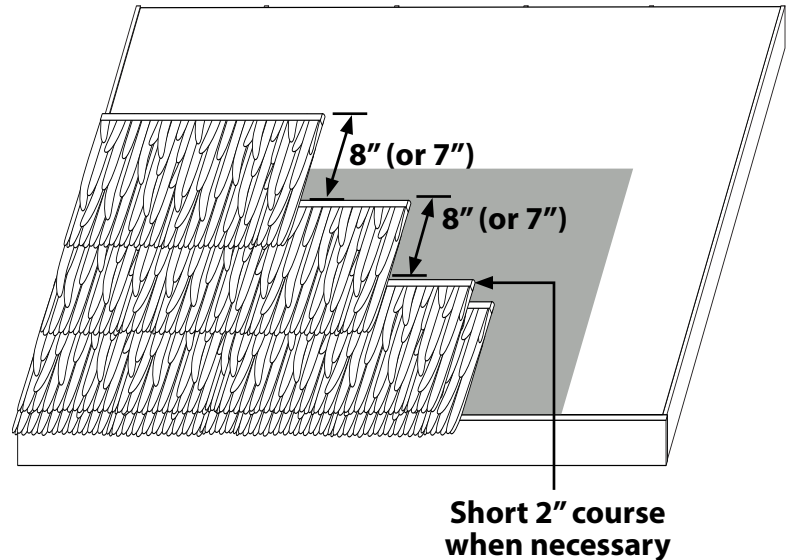

Hip Installation

- Thatch panels will bend around a hip.
- Cut with razor knife or saw (hacksaw, jigsaw, sawzall) with an 18 TPI blade.
- Use panels cut in half to cover the hip line, and install every 6". Contact the manufacturer if assistance is required.
- Install our Baja Palm™ Top Cone (sold separately) on any custom roof peak.

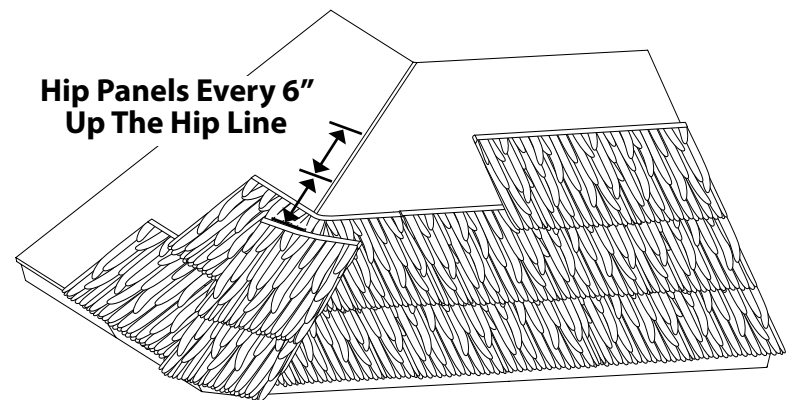

Valley Installation

- Cut thatch panels at proper angle to fit tightly into the valley.
- Cut with razor knife or saw (hacksaw, jigsaw, sawzall) with an 18 TPI blade.

