

## Suction Fix Method

### ⚠ WARNINGS

- Read these instructions carefully
- Only fix to flat, shiny, glazed tiles or glass. Never use on wood, painted, matt or textured surfaces. If fitting to these surfaces is required please refer to screw to wall fixing method
- instruction leaflet which is on the reverse of this sheet.
- Not suitable for marble tiles.
- Do not overload - maximum weight 2kg (4.5lbs)
- Do not use to store glass or breakable items
- Do not position sucker over grout lines
- Keep these instructions for future reference

#### Before installing

1. Thoroughly clean the mounting surface to remove any dirt, residue or contaminants that may reduce the sucker performance.
2. Rinse the mounting surface with clean water and dry with a clean cloth.
3. Rinse each suction bracket in warm water to remove any dust etc. that may have accumulated since manufacture, then dry with a clean cloth.


#### Included in your pack

- (A) Product
- (B) Suction Cup
- (C) Suction Bracket Body
- (D) Spacer
- (E) Cap

NOT ILLUSTRATED ITEMS  
(F) Double End Fixing Screws (used only for screw fix method)  
(G) Wall Plugs (used only for screw fix method)

Content quantities vary depending on product purchased

#### Component parts required

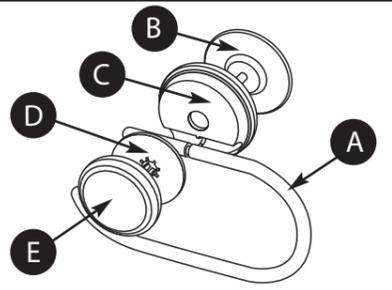

#### Mounting your Twist 'N' Lock Plus Wall Mounted Accessory using the Suction Fix method

<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
Assemble product as shown above. Before placing in desired location turn the caps (E) clockwise until finger tight. Then turn the caps (E) five to six complete rotations anti-clockwise as shown above.	Holding the suction bracket body (C) firmly pull the cap (E) away from the body leaving a small gap between the two parts.	Keeping the gap between the body (C) and the cap (E), position the product in the desired location. Press the centre of the cap (E) firmly closing the gap between the cap (E) and body (C) to expel air from the suction cups.	Ensure the product is level and then rotate the cap (E) clockwise until fully tight. Your product is now ready to use.

#### How to remove your Twist 'N' Lock Plus product

Unscrew and remove the cap (E) while supporting the product. Remove the product, the suction cup can then be peeled away from the mounting surface.

#### Care and maintenance

Suction Fix is a temporary fixing solution. For best performance we recommend that you remove and re-fit your product every 6 - 8 weeks as described above. Clean with a soft damp cloth. Never use abrasive or chemical cleaners.

## Screw Fix Method

### ⚠ WARNINGS

- Read these instructions carefully
- Do not overload - maximum weight 2kg (4.5lbs)
- Wall plugs supplied for solid walls only. Ensure correct wall plug for wall type is used.
- Keep these instructions for future reference

#### Safety and care advice

1. Always take care when using an electric drill, particularly in the bathroom. Always check for hidden cables and pipework before drilling. Always use a residual current circuit breaker (RCCB) when using mains powered tools and take extreme care if there is any water in the working area.
2. Always wear suitable eye protection when drilling.
3. If the product is to be fitted on a ceramic tiled wall, a ceramic drill bit should be used. Do not drill mounting holes in the grouted area between tiles. Mask the area around the hole with tape before drilling to prevent damage to the tile.


#### Included in your pack

- (A) Product
  - (B) Suction Cup (discard for screw to wall fixing)
  - (C) Suction Bracket Body
  - (D) Spacer
  - (E) Cap
  - (F) Double End Fixing Screws
  - (G) Wall Plugs
- Wall plugs supplied for solid walls only. Ensure correct wall plug for wall type is used.

Content quantities vary depending on product purchased

Tools Required:  
Drill; 6mm Masonry Drill Bit (6mm Ceramic Drill bit optional)  
Cross Head Screwdriver; Pencil

#### Component parts required

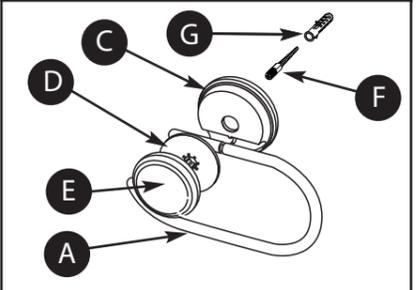

#### Mounting your Twist 'N' Lock Plus Wall Mounted Accessory using the Screw fix method

<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
Select position of product and mark centres of mounting holes. Using a 6mm masonry drill, drill a hole in the marked position to a depth of 30mm. If drilling through tiles, please pre-drill using a ceramic drill bit.	Insert the wall plug (G) to the surface of the wall. If fitting to a tiled surface the wall plug should be inserted below the surface of the tile to avoid cracking. Insert the double end fixing screw (F) into the wall plug up to the shoulder, as shown.	With the cap (E) removed, place the product (A) and body (C) assembly over the exposed shoulders of each screw (F) and align cap (E) as shown.	Ensure the product is level and then rotate the cap (E) clockwise until fully tight. DO NOT OVER TIGHTEN!  Your product is now ready to use.

#### How to remove your Twist 'N' Lock Plus product

Unscrew and remove the cap (E) while supporting the product.

#### Care and maintenance

Clean with a soft damp cloth. Never use abrasive or chemical cleaners.

Loving your new Twist 'N' Lock Plus product? We have a wide range of bathroom accessories, please visit [www.croydex.com](http://www.croydex.com) for more details.

Croydex Limited, Central Way, Andover, Hants, SP10 5AW, UK  
Tel: +44 (0) 1264 365881 Fax: +44 (0) 1264 356437  
Website: [www.croydex.com](http://www.croydex.com) E-mail: [info@croydex.co.uk](mailto:info@croydex.co.uk)

Loving your new Twist 'N' Lock Plus product? We have a wide range of bathroom accessories, please visit [www.croydex.com](http://www.croydex.com) for more details.

Croydex Limited, Central Way, Andover, Hants, SP10 5AW, UK  
Tel: +44 (0) 1264 365881 Fax: +44 (0) 1264 356437  
Website: [www.croydex.com](http://www.croydex.com) E-mail: [info@croydex.co.uk](mailto:info@croydex.co.uk)