

Installation

- 1.** Drape your Enclosure [A] over your golf car. Put the short panel with the single window at the front.
- 2.** Roll all the side, front and back panels down.
- 3.** Locate the two metal black tubes [C]. These are a stiffener for the rear panel. Join these tubes into a single tube by slipping the tapered male end of one tube into a female end of

Installation (continued)


the other tube. On the rear panel underneath the main window there is a strip of sand colored fabric. On the INSIDE of the strip on the left side there is a small hole. Insert the tube [C] into the hole and push it all the way to the right of the panel. Slip the left end of the rod under the left of the slit to hold it in.

4. Zip all the panels shut on the outside of your golf car. Straighten all the sides of your Enclosure and be sure it is centered over the roof.

5. Your Enclosure can be secured to the bottom of your golf car using six pieces of rip-and-grip tape attached to the bottom of your enclosure. Hook them under the bottom of your golf car. The two hooked straps on either side at the back of your enclosure have a buckle connected to the strap that you can pull to tighten.

Your enclosure can also be secured to the bottom of your golf car by pieces of hook and loop tape [D], [E] and [F]. Note that if you do not wish to apply the tape to your car the tape is not essential to the installation of your enclosure.

Attach the adhesive side of the loop tape to the inside bottom of your enclosure in the locations noted on the photo (be sure these areas are clean and dry before applying tape). Trim any tape that does not fit your particular car.

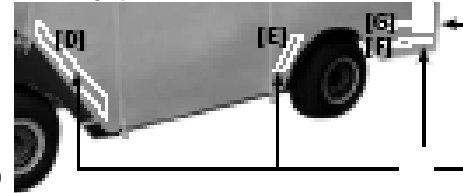

In the areas behind the rear wheels your Enclosure can be down as shown or folded up. If your car is raised, fold the rear panel of your Enclosure up to the inside and secure it by mating the sewn-in lower rip-and-grip strips to the upper strip 10" above it. To secure unfolded, attach tape [F] and strip [G] in the positions shown in the photo.

6. Lift the bottom of each panel where tapes [D], [E] and [F] are, remove the paper backing from the tape and press the Enclosure and tape down onto your car. Leave the tape in position for an hour to 24 hours to let the glue set. If you later remove your Enclosure the color coordinated strips are designed to remain on your car.

7. Unzip the doors on the sides to enter your golf car. To keep either door open simply roll the door up and fasten with the straps at the top. (Tip: If you want to get in and out of your car without rolling up the door just unzip the middle zipper. You will be able to enter or exit by pulling the door back toward the front of the car.)

8. Golf clubs can be loaded and unloaded at the back by unzipping the two rear zippers.

9. In good weather, the front panel, doors, back side panels, and back panel can be rolled up independently.