



**GREE+**  
**MULTI**

**Multi-Room Ductless Inverter Heat Pump Solution**



GREE +Multi systems, with inverter technology, are some of today's most advanced ductless split heat pumps. Providing both cooling and heating comfort, in as many as nine separate zones, they are the perfect solution for many residential and light commercial applications. +Multi systems reduce energy waste, maximize efficiency and achieve up to 16 SEER, with our G10 inverter driven compressors. Best of all, the ultimate in reliable room comfort is generated with Eco-friendly R410A refrigerant

## Design Flexibility

Gree introduces project layout flexibility by simultaneously powering up to nine indoor units with one outdoor unit. For even greater flexibility, mix and match your choice of Wall Mount, Ceiling Cassette, Concealed Duct, Universal Floor/Ceiling and Mini Floor Console indoor units to create your unique +Multi heating and cooling system.

## Energy Savings

Gree +Multi systems are highly efficient zoning heat pumps that will keep operating costs under control, year round. No need for a bulky add-on coil or expensive-to-operate electric heat. Our variable speed heat pumps, powered by the G10 inverter, provide the same heating capacity as electric heat, while using as little as 1/3 the electricity. With +Multi ductless systems, there are no losses due to leaky ductwork.

## Maximum Comfort

+Multi systems eliminate irritating temperature swings, by continuously monitoring comfort levels and adjusting compressor speed and refrigerant flow according to the cooling and heating needs of each room. Additionally, you can create your own personal-comfort-zone, by activating the I-Feel function on the remote control. With I-Feel activated, +Multi systems will sense temperatures surrounding the remote control, and adjust compressor speed and air flow to maintain the comfort level of your personal space.

## Durability & Longevity

All duct free +Multi units are made from heavy gauge rolled steel and covered with a durable powder coat paint finish. Gree's enhanced Gold-Fin coating provides condenser coil protection in corrosive environments, while improving hydrophilic properties and efficiency; and our multi-point self-diagnostics continuously monitor critical system parameters to prevent catastrophic failures. These, along with many other, design considerations will extend the life of your +Multi system.





# Multi Zone Inverter Heat Pump



Each +Multi heat pump is powered by Gree's energy efficient G10 inverter and a variable speed compressor. These units can heat and cool up to 5 zones without distribution boxes. Our G10 inverter technology saves energy, reduces outdoor noise and keeps room temperature steady by eliminating the harsh starts & stops of conventional systems. Each outdoor coil has a corrosion resistant Gold Fin coating to promote energy efficiency and prevent coil corrosion in corrosive environment.

- Heavy Gauge Steel Cabinet
- Sound Levels down to 56 DB
- Low Ambient Cooling down to 5 deg F
- No Refrigerant Distribution Boxes
- Indoor Master/Slave Settings
- Multi-point Diagnostics
- Multi Condensate Ports
- R410A Refrigerant

Outdoor Unit HP Inverter		MULTI18HP230V1AO	MULTI24HP230V1AO	MULTI30HP230V1AO	MULTI36HP230V1AO	MULTI42HP230V1AO
System Type		Heat Pump				
Cooling Capacity (Min-Max)	Btu/h	18,000(7,000-21,000)	26,000(7,500-33,000)	29,000(7,500-34,000)	34,000(8,530-34,120)	41,000(8,530-46,403)
Heating Capacity (Min-Max)	Btu/h	19,000(8,530-22,600)	29,000(7,500-35,000)	30,500(7,500-36,000)	35,800(10,663-40,944)	44,500(10,663-47,768)
Power Supply		208-230V/60Hz	208-230V/60Hz	208-230V/60Hz	208-230V/60Hz	208-230V/60Hz
Rated Current (A) Cooling	Amps	7.6	13.5	15.3	19.5	19.5
Rated Current (A) Heating	Amps	7.5	12.4	12.6	17.4	20.5
Operation Range - Cooling	deg F	23 - 118.4	23-118.4	23-118.4	23-118.4	23-118.4
Operation Range - Heating	deg F	5~81	5~81	5~81	5~81	5~81
Compressor Type		DC Inverter-driven Twin rotary				
Sound Pressure Level	db (A)	56	56	59	57	58
Unit Dimension (WxHxD)	inches	35.4x23.5x14.9	37.2 x27.6x15.6	36.2x31.1x16.8	38.5x31.2x15	40x43.5x17.4
Package Dimension (WxHxD)	inches	37.3x25.4x16.5	40.5x29.5x18	40.5x29.5x18	42.7x33.7x19.2	45.6x48.7x19.4
Net/Gross Weight	lb	95/106	135/146	153/165	161/172	225/247
Condenser Coil type		Copper/Aluminum with GOLD FIN Coating				
Max # Indoor Units		2	3	4	4	5
Refrigerant / Charge	oz.	R410A/ 47.6	R410A/ 77.6	R410A/102.3	R410A/ 91.7	R410A/169.3
Port Size (Liquid - Suction)	inches	1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-3/8"
		1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-3/8"
			1/4"-3/8"	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"
				1/4"-3/8"	1/4"-5/8"	1/4"-1/2"
						1/4"-5/8"
Pre-Charge (Ft.)	Feet	33	100	130	130	165
Additional Refrigerant charge/ additional feet	oz.	0.2	0.2	0.2	0.2	0.2
Max. Total Piping Length (Ft.)	Feet	66	230	230	230	262
Max. Equivalent Length (Outdoor to last Indoor Unit)	Feet	33	66	66	82	82
Max. Elevation (Outdoor to Indoor Unit)	Feet	16	33	33	50	50
MCA	Amps	12.2	12.2	4.3	20	25
MOCP	Amps	25	30	30	40	40



# Super Multi Zone Inverter Heat Pump



No project is too large for Gree. Our Super +Multi heat pump systems utilize G10 inverter technology to provide lower power consumption and quieter sound levels, while providing trouble free comfort. Gree's 2-port or 3-port BU Modules vary refrigerant volumes and allow one outdoor unit to connect to as few as 2 to a maximum of 8 (48,000 Btu/h) or 9 zones (56,000 Btu/h). The longer refrigerant line capabilities, of Super +Multi heat pumps, simplify system layout and offer much more flexibility locating indoor units.

## Features and Benefits:

- 2 port or 3 port BU Modules
- Sound Levels down to 57 DB
- Low Ambient Cooling down to 5 deg F
- Piping Length up to 140ft (48K model) and 475 ft ( 56K model)
- Intelligent Defrost
- Multi-point Diagnostics
- R410A Refrigerant

BU Port Expander Modules			
Model		RFX12A 2 Port	RFX13A 3 Port
Rated Current	A	3.15	3.15
Power supply	PhV/Hz	1/208~230/60	1/208~230/60
Sound pressure level	dB(A)	28	28
Dimension (WxDxH)	Unit	inch	20 15/16 x 12 5/16 x 7 3/16
	Package	inch	27 x 15 1/2 x 10 5/8
532x313x182			683x392x270
Connection Method		-	Flare
No. of IDU can connected		-	2
Net weight/Gross weight	lbs		12.1/16.5
Connecting pipe diameter (to IDU)	Gas/Suction	inch(mm)	φ3/8(9.52)
	Liquid	inch(mm)	φ1/4(6.35)
Connecting pipe diameter (to IDU)	Gas/Suction	inch(mm)	φ5/8(15.9)
	Liquid	inch(mm)	φ3/8(9.52)
Maximum connect IDU NO.	unit		2
Max. Equivalent Connection Pipe Length (BU unit to Last Indoor)	ft		60
			60

Outdoor Unit HP Inverter		MULTI48HP230V1AO	MULTI56HP230V1AO
System Type		Heat Pump	
Cooling Capacity (Min-Max)	Btu/h	47,800(3,412-54,592)	52,900(3,412-61,416)
Heating Capacity (Min-Max)	Btu/h	54,600(4,094-59,369)	61,400(4,094-63,122)
Power Supply		208~230V/60Hz	208~230V/60Hz
Rated Current (A) Cooling	Amps	23	25
Rated Current (A) Heating	Amps	20	23
Operation Range - Cooling	deg F	5-118	5-118
Operation Range - Heating	deg F	-4~75	-4~75
Compressor Type		DC Inverter-driven Twin rotary	
Sound Pressure Level	db (A)	57	57
Unit Dimension (WxHxD)	inches	35x53x15	35x53x15
Package Dimension (WxHxD)	inches	35x53x15	39x55x18
Net / Gross Weight	lb	39x55x18	
Condenser Coil type		Copper/Aluminum with GOLD FIN Coating	
Max # Indoor Units		8	9
Refrigerant / Charge	oz.	R410A/174.64	R410A/174.64
Port Size (Liquid)			
Liquid Port	inches	3/8"	3/8"
Suction/Gas Port	inches	5/8"	5/8"
Pre-Charge (Ft.)	Feet	25	25
Additional Refrigerant charge/ additional feet	oz.	0.54	0.54
Max. Total Piping Length (Ft.)	Feet	476	476
Max. Equivalent Length (Outdoor to last Indoor Unit)	Feet	230	230
Max. Elevation (Outdoor to Indoor Unit)	Feet	99	99
MCA	Amps	30	30
MOCP	Amps	50	50

# Wall Mount



When it comes to fighting the heat, you need the NEO +Multi Wall Mount at your side. Don't be fooled by its compact design. Our +Multi Wall Mount is energy efficient, yet powerful enough to keep you comfortable all year round. Gree's whisper quiet fan technology means you'll always have quiet comfort, without any distracting noise. Its attractive compact design mounts in a small amount of wall space near the ceiling, and fits seamlessly into any decor. The fully featured +Multi Wall Mount can be operated by an infrared remote control or a wired tether controller, allowing you to easily manage a variety of useful features to further enhance room comfort.

## Features and Benefits:

- Four Fan Speeds
- IR Remote Controller
- Turbo Mode
- Comfortable Sleep Mode
- Vertical Swing Louver
- Cleanable Air Filter
- Dry Coil Mode for Anti-Mildew Protection
- Remote Control Lockout
- Power Failure Recovery
- Healthy Filter (Optional)
- Tether Wired Controller (Optional)

Neo Indoor Unit HP Inverter		NEO09HP230V1AH	NEO12HP230V1AH	NEO18HP230V1AH
SystemType		Heat Pump		
Nominal Capacity - Cooling	Btu/h	9,000	12,000	18,000
Nominal Capacity - Heating	Btu/h	9,800	13,000	19,800
Power Supply		208-230V/60Hz	208-230V/60Hz	208-230V/60Hz
Running Current	Amps	0.17	0.17	0.32
Airflow-T/H/M/L	CFM	306/277/253/218	335/277/253/218	500/459/383/324
SoundPressureLevel -T/H/M/L	dB	42/38/35/32	44/39/36/33	49/44/40/35
Unit Dimension (WxHxD)	inches	33.3x10.8x7.1	33.3x10.8x7.1	37.0x11.7x7.9
PackageDimension (WxHxD)		36.1x14.6x10.2	36.1x14.6x10.2	39.8x15.0x11.2
Net /GrossWeight	lb	22/29	22/29	24/31
Piping Connections (Liquid - Suction)	inches	1/4" -3/8"	1/4" -3/8"	1/4" -1/2"

# Ceiling Cassette




Gree's +Multi Ceiling Cassette will inconspicuously provide quiet performance through innovative design. The +Multi Ceiling Cassette is extremely suitable for any room, and can be easily installed in suspended ceilings with only a discreet decorative discharge grille visible. Gree's fan technology quietly and evenly distributes conditioned air throughout the room, and an internal condensate pump reliably disposes condensate water to a safe location. The +Multi Ceiling Cassette is ideal for light commercial applications which require comfort control in large, open spaces. Each +Multi Ceiling Cassette can be operated by an infrared remote control or wired tether controller, allowing maximum flexibility for any application.

## Features and Benefits:

- 4-way Discharge Air
- Multi Speed Fan
- Remote Control Lockout
- Swing Louver
- Decorative Discharge Air Grille (sold separately)
- IR Remote Control and Tether Wired Controller
- Power Failure Recovery
- Healthy Filter (Optional)
- Internal Condensate Drain Pump
- Sentry Float Switch
- Cleanable Air Filter
- Fresh Air Intake ( 24K model only)

Ceiling Cassette Indoor Unit		CAS12HP230V1AC	CAS18HP230V1AC	CAS24HP230V1AC
System Type		Heat Pump		
Nominal Capacity-Cooling	Btu/h	11,946	15,359	22,867
Nominal Capacity-Heating	Btu/h	13,652	17,065	27,304
Power Supply		1/208~230/60	1/208~230/60	1/208~230/60
Running Current	Amps			
Airflow- T/H/M/L	CFM	353	353	694
Sound Pressure Level - T/H/M/L	db (A)	46/44/42	46/44/42	39/37/35
Unit Dimension (WxHxD)	inches	22.5x22.5x9	22.5x22.5x9	33x33x9.5
Package Dimension (WxHxD)	inches	33.5x29x13	33.5x29x13	38x38x13
Net / Gross Weight	lbs	40/51	40/51	62/77
Piping Connections(Suction)	inches	φ3/8	φ1/2	φ5/8
Liquid	inches	φ1/4	φ1/4	φ3/8
		Decorative Discharge Grille		
Part Number - Discharge Grille		CASGRILLE1SM	CASGRILLE1SM	CASGRILLE1LG
Unit Dimension (WxHxD)	inches	25.5x25.5x2	25.5x25.5x2	37.5x37.5x2.5
Package Dimension (WxHxD)	inches	29x26.5x4.5	29x26.5x4.5	41x40.5x5
Net / Gross Weight	lbs	6/8	6/8	6.5/10

# Slim Duct

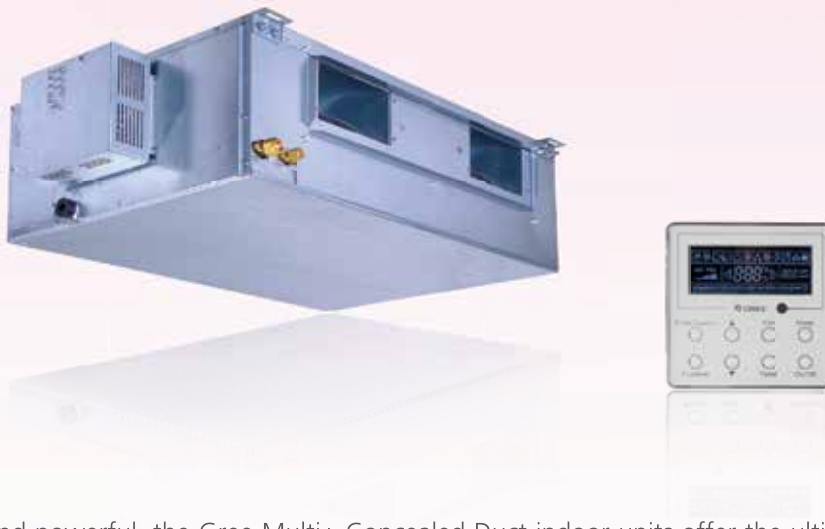

Compact and powerful, the Gree Multi+ Concealed Duct indoor units offer the ultimate in flexibility and discretion. These slim indoor units are designed to be concealed above suspended ceilings or within open closet spaces to deliver conditioned air via ducting and suitable ceiling or wall grilles. This arrangement provides immense flexibility, in terms of both the distribution of conditioned air and the type of grille or diffuser that best compliments the room's styling. Each unit comes with an easy to operate wall mounted tether controller.

## Features and Benefits:

- Medium Static Pressure Capability
- Slim Line Construction 7-7/8" high
- Flexible Return Air From Bottom Or Rear.
- Internal Condensate Drain Pump
- Sentry Float Switch
- Environmentally Safe R-410A Refrigerant

Ceiling Cassette Indoor Unit		DUCT09HP230V1AD	DUCT12HP230V1AD	DUCT18HP230V1AD	DUCT24HP230V1AD
System Type		Heat Pump			
Nominal Capacity-Cooling	Btu/h	8,533	11,946	15,359	24,232
Nominal Capacity-Heating	Btu/h	9556	13,140	18,772	27,304
Power Supply		208/230V/60hz	208/230V/60hz	208/230V/60hz	208/230V/60hz
Running Current	Amps				
Airflow- T/H/M/L	CFM	265	294	412	588
Sound Pressure Level - T/H/M/L	db (A)	37/31	39/32	41/33	42/34
External Static Pressure	WG				
Unit Dimension (WxHxD)	inches	27.5x24 x7.87	27.5x24x7.87	35.5x24x7.87	43.5x24x7.87
Package Dimension (WxHxD)	inches	35x29x12	35x29x12	44x29x12	52x29x12
Net / Gross Weight	lbs	48.5/60	51/64	60/79	68/90
Piping Connections: Gas/Suction	inches	φ3/8	φ3/8	φ1/2	φ5/8
Liquid	inches	φ1/4	φ1/4	φ1/4	φ3/8



# Universal Floor/Ceiling



Our Multi+ Universal Floor/Ceiling indoor units are designed to be suspended from a ceiling or mounted low on a wall. The slender and lightweight design is perfect for restaurants or hallways where wall space is limited. Aesthetically pleasing to the eye, the Multi+ Universal Floor/Ceiling units are a great fit beneath windows, in public or light commercial applications. Each unit can be operated by an infrared remote control or wired tether controller to allow maximum flexibility in any application.

## Features and Benefits:

- 4-way Discharge Air
- Multi Speed Fan
- IR Remote Control and Tether Wired Controller
- Comfortable Sleep Mode
- Swing Louver
- Cleanable Air Filter
- Dry Coil mode for Anti -Mildew Protection
- Remote Control Lockout
- Power Failure Recovery

Floor/Ceiling Indoor Unit		FLR09HP230V1AF	FLR12HP230V1AF	FLR18HP230V1AF	FLR24HP230V1AF
System Type		Heat Pump			
Nominal Capacity - Cooling	Btu/h	8,533	11,946	17,065	22,867
Nominal Capacity - Heating	Btu/h	9556	13,140	18,772	27,304
Power Supply		208/230V/60hz	208/230V/60hz	208/230V/60hz	208/230V/60hz
Running Current	Amps				
Airflow- T/H/M/L	CFM	382	382	559	736
Sound Pressure Level - T/H/M/L	db (A)	40/38/36	40/38/36	45/42/40	48/46/44
Unit Dimension (WxHxD)	inches	48x27.5x9	48x27.5x9	48x27.5x9	48x27.5x9
Package Dimension (WxHxD)	inches	53x32x12.5	53x32x12.5	53x32x12.5	53x32x12.5
Net / Gross Weight	lbs	88/110	88/110	88/110	100/120
Piping Connections: Gas/Suction	inches	φ3/8	φ3/8	φ1/2	φ5/8
Liquid	inches	φ1/4	φ1/4	φ1/4	φ3/8



# Mini Floor Console



Gree's +Multi Mini Console indoor units are aesthetically pleasing and the perfect size for any room. The space saving design provides energy efficient solutions for difficult areas that may not have abundant space on the ceiling or walls. It can be mounted as low as six inches above the floor and has front panel access to the filter for ease of cleaning. Each +Multi Mini Console unit can be operated by an infrared remote control.

## Features and Benefits:

- 4-way Discharge Air
- Multi Speed Fan
- Comfortable Sleep Mode
- Swing Louver
- Cleanable Air Filter
- Dry Coil Mode for Anti-Mildew Protection
- Environmentally Safe R-410A Refrigerant

Console Indoor Unit		CONS09HP230V1AF	CONS12HP230V1AF	CONS18HP230V1AF
System Type		Heat Pump		
Nominal Capacity - Cooling	Btu/h	8,874	11,946	18,089
Nominal Capacity - Heating	Btu/h	9,556	12,969	19,795
Power Supply		208/230V/60hz	208/230V/60hz	208/230V/60hz
Running Current	Amps			
Airflow- T/H/M/L	CFM	294	353	383
Sound Pressure Level - T/H/M/L	db (A)	40/38/36/33/30/27/25	42/40/38/37/35/32/27	48/46/44/41/37/35/32
Unit Dimension (WxHxD)	inches	27.5 x 24 x 8.5	27.5 x 24 x 8.5	27.5 x 24 x 8.5
Package Dimension (WxHxD)	inches	31 x 28 x 11	31 x 28 x 11	31 x 28 x 11
Net / Gross Weight	lbs	33/40	33/40	33/40
Piping Connections (Liquid - Suction)	inches	φ3/8	φ3/8	φ1/2
Liquid	inches	φ1/4	φ1/4	φ1/4



Gree +Multi duct free split systems are designed to provide comfort, uncompromising personal style, quiet operation and installation flexibility. Simply choose the type of indoor unit and capacity for each room, and then select your system from our matching outdoor/indoor unit combinations chart (below). For a complete list of matching combinations and capacities, please refer to [www.greecomfort.com](http://www.greecomfort.com) or check with your GREE dealer/installer.

## Matching combinations and capacities

MULTI18HP230V1AO 4 Combinations



One unit	Two units
9	9+9
12	9+12
	12+12

MULTI24HP230V1AO 11 Combinations



Two units		Three units	
9+9	9+12	9+9+9	9+12+12
9+18	12+12	9+9+12	9+9+18
12+18	18+18	12+12+12	

MULTI30HP230V1AO 16 Combinations



Two units		Three units			Four units	
9+9	9+12	9+9+9	9+9+12	9+9+18	9+9+9+9	9+9+9+12
9+18	12+12	9+12+12	9+12+18	12+12+12	9+9+12+12	
12+18	18+18	12+12+18				

MULTI36HP230V1AO 34 Combinations \*



Two units		Three units			Four units	
9+9	12+18	9+9+9	9+12+18	12+12+12	9+9+9+9	9+9+12+18
9+12	12+24	9+9+12	9+12+24	12+12+18	9+9+9+12	9+9+18+18
9+18	18+18	9+9+18	9+18+18	12+12+24	9+9+9+18	9+12+12+12
9+24	18+24	9+9+24	9+18+24	12+18+18	9+9+9+24	9+12+12+18
12+12	24+24	9+12+12		18+18+18	9+9+12+12	12+12+12+12

\*24K size is reserved for ceiling cassettes, concealed ducts, and floor/ceiling units only not wall mount units.

# Matching combinations and capacities



MULTI42HP230V1AO 57 Combinations \*

Two units		Three units			Four units			Five units	
9+12	12+24	9+9+9	9+12+24	12+12+24	9+9+9+9	9+9+12+24	9+12+18+18	9+9+9+9+9	9+9+9+18+18
9+18	18+18	9+9+12	9+18+18	12+18+18	9+9+9+12	9+9+18+18	9+18+18+18	9+9+9+9+12	9+9+12+12+12
9+24	18+24	9+9+18	9+18+24	12+18+24	9+9+9+18	9+9+18+24	12+12+12+12	9+9+9+9+18	9+9+12+12+18
12+12	24+24	9+9+24	9+24+24	12+24+24	9+9+9+24	9+12+12+12	12+12+12+18	9+9+9+9+24	9+12+12+12+12
12+18		9+12+12	12+12+12	18+18+18	9+9+12+12	9+12+12+18	12+12+12+24	9+9+9+12+12	9+12+12+12+18
		9+12+18	12+12+18	18+18+24	9+9+12+18	9+12+12+24	12+12+18+18	9+9+9+12+18	12+12+12+12+12

\*24K size is reserved for ceiling cassettes, concealed ducts, and floor/ceiling units only not wall mount units.



MULTI48HP230V1AO 90 Combinations

Two units	Three units	Four units			Five units		Six units	Seven units
9+18	9+9+9	12+12+12	9+9+9+9	9+12+12+12	12+12+12+18	9+9+9+9+9	9+9+12+12+24	9+9+9+9+9+9
9+24	9+9+12	12+12+18	9+9+9+12	9+12+12+18	12+12+12+24	9+9+9+9+12	9+9+12+18+18	9+9+9+9+9+12
12+12	9+9+18	12+12+24	9+9+9+18	9+12+12+24	12+12+18+18	9+9+9+9+18	9+9+12+18+24	9+9+9+9+9+18
12+18	9+9+24	12+18+18	9+9+9+24	9+12+18+18	12+12+18+24	9+9+9+9+24	9+12+12+12+12	9+9+9+9+9+24
12+24	9+12+12	12+18+24	9+9+12+12	9+12+18+24	12+12+24+24	9+9+9+12+12	9+12+12+12+18	9+9+9+9+12+12
18+18	9+12+18	12+24+24	9+9+12+18	9+12+24+24	12+18+18+18	9+9+9+12+18	9+12+12+12+24	9+9+9+9+12+18
18+24	9+12+24	18+18+18	9+9+12+24	9+18+18+18	12+18+18+24	9+9+9+12+24	9+12+12+18+18	9+9+9+9+12+24
24+24	9+18+18	18+18+24	9+9+18+18	9+18+18+24		9+9+9+18+18	12+12+12+12+12	9+9+9+12+12+12
	9+18+24	24+24+24	9+9+18+24	12+12+12+12		9+9+9+18+24	12+12+12+12+18	9+9+9+12+12+18
	9+24+24					9+9+12+12+12	12+12+12+12+24	9+9+12+12+12+12
						9+9+12+12+18	12+12+12+18+18	9+9+12+12+12+18



MULTI56HP230V1AO 131 Combinations

Two units	Three units	Four units					
9+18	9+9+12	9+18+24	12+18+24	9+9+9+9	9+9+18+24	9+18+18+18	12+12+18+24
9+24	9+9+18	9+24+24	12+24+24	9+9+9+12	9+9+24+24	9+18+18+24	12+12+24+24
12+18	9+9+24	12+12+12	18+18+18	9+9+9+18	9+12+12+12	9+18+24+24	12+18+18+18
12+24	9+12+12	12+12+18	18+18+24	9+9+9+24	9+12+12+18	9+24+24+24	12+18+18+24
18+18	9+12+18	12+12+24	18+24+24	9+9+12+12	9+12+12+24	12+12+12+12	12+18+24+24
18+24	9+12+24	12+18+18	24+24+24	9+9+12+18	9+12+18+18	12+12+12+18	18+18+18+18
24+24	9+18+18			9+9+12+24	9+12+18+24	12+12+12+24	18+18+18+24
				9+9+18+18	9+12+24+24	12+12+18+18	

MULTI56HP230V1AO 131 Combinations (cont.)

Five units		Six units			Seven units			
						9+9+9+9+18+18	9+9+9+9+9+9+9	9+9+9+9+9+9+9+9
						9+9+9+9+12+12+12	9+9+9+9+9+9+12	
9+9+9+9+9	9+9+12+12+18	9+12+12+18+18	9+9+9+9+9+9	9+9+9+12+12+12	9+9+12+12+18+18	9+9+9+9+9+9+9	9+9+9+9+12+12+18	9+9+9+9+9+9+18
9+9+9+9+12	9+9+12+12+24	9+12+12+18+24	9+9+9+9+9+12	9+9+9+12+12+18	9+12+12+12+12+12	9+9+9+9+9+9+12	9+9+9+12+12+12+12	9+9+9+9+9+9+12+18
9+9+9+9+18	9+9+12+18+18	9+12+12+24+24	9+9+9+9+9+18	9+9+9+12+12+24	9+12+12+12+12+18	9+9+9+9+9+9+18	9+9+9+12+12+12+18	9+9+9+9+9+9+12+12+12
9+9+9+9+24	9+9+12+18+24	12+12+12+12+12+12	9+9+9+9+9+24	9+9+9+12+12+24	9+12+12+12+12+24	9+9+9+9+9+9+24	9+9+12+12+12+12+12+12	
9+9+9+12+12	9+9+12+24+24	12+12+12+12+18	9+9+9+9+12+12	9+9+9+12+18+18	9+12+12+12+18+18	9+9+9+9+9+12+12	9+12+12+12+12+12+12+12	
9+9+9+12+18	9+9+18+18+18	12+12+12+12+24	9+9+9+9+12+18	9+9+9+12+18+24	12+12+12+12+12+12	9+9+9+9+9+12+18		
9+9+9+12+24	9+9+18+18+24	12+12+12+18+18	9+9+9+9+12+24	9+9+12+12+12+12	12+12+12+12+12+18	9+9+9+9+9+12+24		
9+9+9+18+18	9+12+12+12+12	12+12+12+18+24	9+9+9+9+18+18	9+9+12+12+12+18				
9+9+9+18+24	9+12+12+12+18	12+12+18+18+18	9+9+9+9+18+24	9+9+12+12+12+24				
9+9+12+12+12	9+12+12+12+24							

Note: It is critical to size the outdoor unit for the entire building load and each indoor unit for its individual zone load.



## A company founded on quality and value

GREE Electric Appliances, Inc. is the world's largest specialized air conditioner manufacturer, selling more than 100 million units in over 100 countries since 1991. The GREE brand is world-renowned for engineering 7,000 different models in 20 product categories, developing 3,000 worldwide technical patents and pioneering the Variable Refrigerant Flow system that has revolutionized modern day comfort.

GREE prides itself on the reliability and quality of its products. World class, state-of-the-art quality control methods are employed throughout the manufacturing process, including the use of a separate plant where all key components are pre-tested. More than 1,000 Research & Development technicians spend each day pursuing new and innovative designs as a commitment to ensuring customers always receive the highest quality for the best value in the world.

**Scan to learn more about GREE  
Inverter ductless systems.**

or visit us at [greecomfort.com](http://greecomfort.com)

