

# **ELECTRIC COOKTOPS**

### **SIGNATURE FEATURES**




#### **GLIDE-2-SET® CONTROL PANEL**

At the touch of a button adjust temperature so dishes come out perfectly.



#### FLEX-2-FIT® ELEMENTS

Elements adjust up to three sizes, so the element fits the cookware, not the other way around



#### **TRIPLE ELEMENT**

An element that offers the versatility of three element sizes for ultimate flexibility, so it fits your cookware.



#### DIGITAL PRESET TOUCH SETTINGS

Up to 15 preset touch settings make adjusting heat up or down a snap.

## EI30EC45K S/B

#### PRODUCT DIMENSIONS

Width 30-3/4"

Depth 21-3/4"

Height (Extreme Bottom to Underside of Cooktop) 6-5/8"

#### **MORE EASY-TO-USE FEATURES**

#### **PLATINUM STAR® LIMITED WARRANTY**

Our exclusive limited warranty that includes a 3-year coverage on parts and one year on labor without charge.1

#### PERFECT OVER A WALL OVEN

Mounts above a single wall oven for additional installation options.

#### A.D.A. COMPLIANT

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

#### Available in:




ELEMENT	WATTS
6" to 9" to 12" Triple Expandable Element	1200W/2000W/3000W
9" Electric Element	3200W
6" Electric Element – Right Rear	1200W
6" Electric Element – Center Rear	1200W

Eligibility based on product registration with Electrolux North America within 60 days of purchase. Products must have been purchased on or after July 1, 2013. Coverage includes material parts for 3 years and labor for 1 year.



FEATURES	
Glide-2-Set® Electronic Touch Controls	Yes
Ceramic Smoothtop Glass Surface	Yes
6" to 9" to 12" Triple Expandable Element – 1200W/2000W/3000W	1
9" Electric Element – 3200W	1
6" Electric Element – Right Rear	1
6" Electric Element – Center Rear	1
Hot Surface Indicator Lights	Yes
Keep Warm Setting	Yes
Sabbath Mode (Star-K® Certified)	Yes
A.D.A. Compliant*	Yes
ACCESSORIES	
Granite Countertop Installation Kit – PN# 903061-9010	Optional
Cleaning Sponge	Included
SPECIFICATIONS	
Color –	
Stainless Steel	S
Black	В
Power Supply Connection Location	Right Center Rear
Connected Load (kW Rating) @ 240/208 Volts	8.6/6.5
Amps @ 240/208 Volts	35.8/30.8
Minimum Circuit Required (Amps)	40
Electrical – Single phase 4-wire cable, 120/240 Volts or 120/208 Volts, 60 Hz, fused on both sides of line with ground.	Required
Armored Electrical Cable	Included
Approved for Single Oven Combination Installation**	Yes
	58 Lbs.
Shipping Weight (Approx.)	
Shipping Weight (Approx.) "When properly installed, this model is A.D.Aqualified based on the United States Access Bi Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessib	oard's A.D.A./A.B.A. nle Design.

<sup>\*\*</sup>Approved to be used over any Electrolux Single Wall Oven




Width	30-3/4"
Depth	21-3/4"
Height (Extreme Bottom to Underside of Cooktop)	6-5/8"







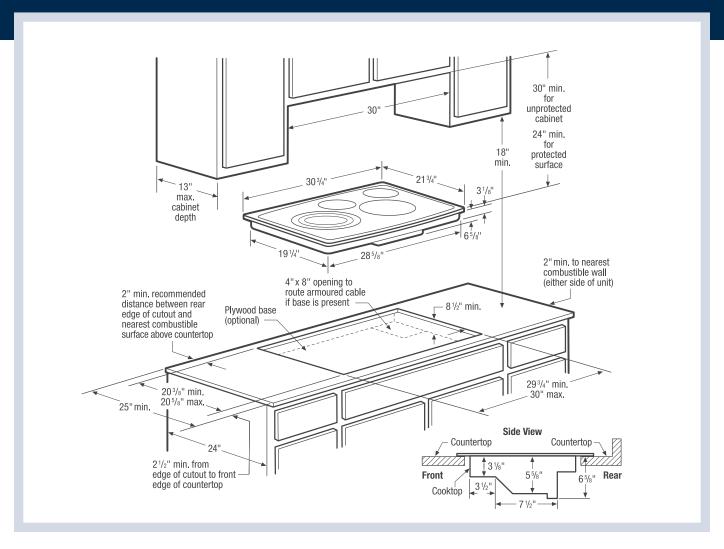

#### 30" Electric Touch-Control Cooktop Specifications

- Product Weight 50 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground. (If local code permits, range may be connected by hard-wiring or by means of power supply cord kit.)
- Connected Load (kW Rating) @ 240/208 Volts = 8.6/6.5 kW
- Amps @ 240/208 Volts = 35.8/30.8 Amps
- Recommended Circuit Breaker 40 Amps
- · Always consult local and national electric codes.
- · Allow 2" space beneath cooktop or optional platform to clear electrical cable and allow space for installation of junction box on wall at back of cooktop. Position center of junction box 10" inward from right side of cooktop cutout, and 12" down from underside of countertop.
- · Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- · Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than 36"
- · Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020 copper.

- Allow 2" minimum clearance between rear edge of cutout and nearest combustible surface above countertop.
- Allow 2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- Installation of drawers beneath cooktop requires minimum 10" clearance beneath countertop surface and assured clearance for electrical connection.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets
- · Touch-Control Cooktop model El30EC45K is approved to be used over any Electrolux Electric Single Wall Oven (EW27EW55P, EW30EW55P, EI27EW35P

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

#### **Optional Accessories**

Granite Countertop Installation Kit – (PN# 903061-9010).



