

TAMKO® Slate Surfaced Roll Roofing

PRODUCT DATA

Manufactured in Joplin, MO

TAMKO® SLATE SURFACED ROLL ROOFING is constructed from TAMKO's organic mat, impregnated with hot asphaltic saturant, then coated on both sides with weathering grade asphalt and surfaced with mineral granules.



USES

For application to roof decks with inclines of not less than 2 inches per foot.


PRODUCT DATA*

Roll Dimensions	36' X 36"
Coverage per roll	1 Square

*All values stated as nominal

COLORS

- Weathered Wood
- White
- Rustic Cedar
- Sand Pebble
- Rustic Black
- Empire Green Blend
- Tweed Blend
- Rustic Brown

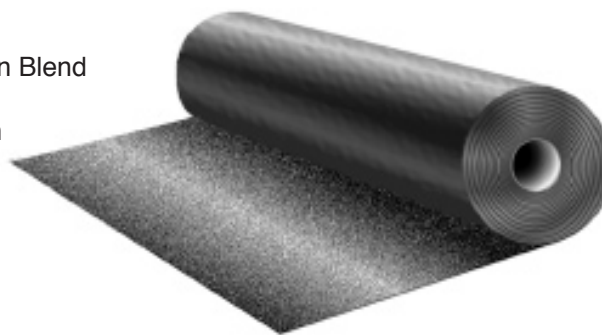

THIS PRODUCT IS SOLD "AS IS" WITHOUT WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

CAUTION: The National Institute for Occupational Safety and Health (NIOSH) has concluded that fumes of heated asphalt are a potential occupational carcinogen. Do not heat or burn this product.



TAMKO®
BUILDING PRODUCTS
TAMKO Logo, Roofer Logo, and TAMKO®
are registered trademarks of
TAMKO® Building Products, Inc.

04/2008

Central District	220 West 4th St., Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr., Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St., Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp., Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave., Denver, CO	80216	800-530-8868

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.