




Model #: EZD-FR-30 & EZD-FR-28

INSTALLATION GUIDE

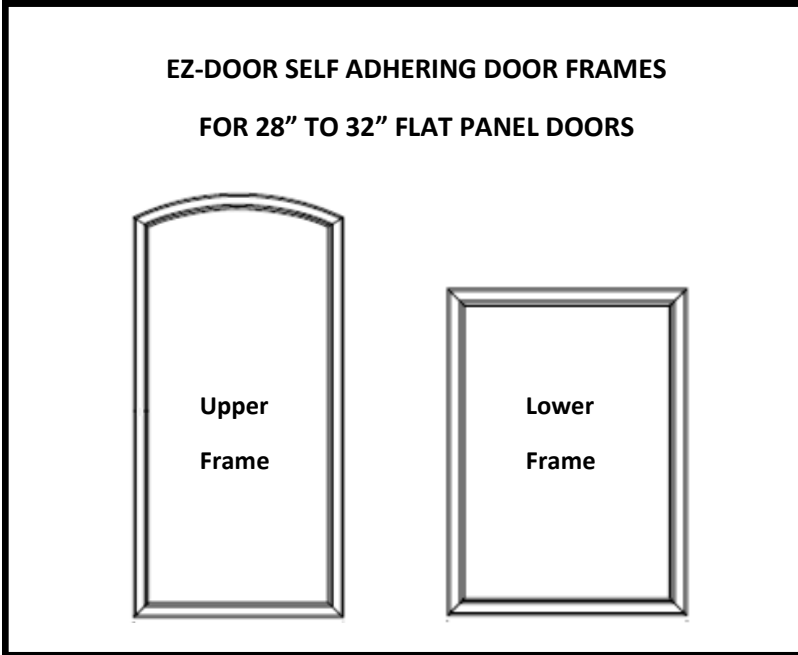

Question, problems, missing parts? Before returning to the store,

Call Trevconn Enterprises Customer Service

8 a.m.—6 p.m., PST, Monday—Friday

1-805-754-2371 Extension #1

WWW.TREVCONN.COM

ONLINE INSTALLATION VIDEO: WWW.TREVCONN.COM/VIDEOS

THANK YOU

We appreciate the trust and confidence you have placed in Trevconn Enterprises through the purchase of EZ-Door Self Adhering Door Frames. We strive to continually create quality products designed to enhance your home. Thank you for choosing Trevconn Enterprises.

Safety & Care Information

Read and fully understand ALL instructions before beginning.

- 1 Use safe lifting techniques.
- 2 Although EZ-Door Frames are not fragile they should always be handled with care to avoid bending to ensure proper mounting.
- 3 Do not subject the EZ-Door Frames to extremes of heat. Buildings where temperature is controlled provide the best conditions (recommended conditions 33°F to 100°F).
- 4 It is recommended you notify others of your intended work to prevent door use during installation.
- 5 Do not install EZ-Door Frames on doors that have surface moisture or dirt.

Warranty & Parts Replacement Information

The item must be returned in good condition, in original boxes (whenever possible), and with all paperwork, parts and accessories to ensure full credit.

**What This Warranty Covers:** Trevconn Enterprises warrants its parts and products to be free of substantial defects in materials and workmanship from the original date of purchase under normal home use. This warranty is offered only to the original consumer purchaser and may not be transferred.

**How Long The Warranty Lasts:** Coverage lasts for one year from the original date of purchase.

**What Trevconn Enterprises Will Do Under The Warranty:** During the warranty period Trevconn Enterprises will replace any part or product that proves to have substantial defects in materials or workmanship.

**Implied Warranties:** Trevconn Enterprises disclaims any implied warranty of merchantability, and there are no warranties that extend beyond the descriptions on the face hereof. To the extent that such disclaimer is not valid under applicable law, any implied warranty shall be coextensive in duration with this warranty.

**What This Warranty Does Not Cover:** This warranty does not cover any problems or damage which result from improper transportation, improper installation including sealant or paint products, mishandling, misuse, abuse, neglect, abnormal use, improper maintenance, accidents, or acts of God, such as hurricanes, fire, earthquakes or floods. This warranty and any applicable implied warranties do not cover incidental or consequential damages arising from any defects in the product, such as labor charges for installation or removal of the product or any associated products. This warranty does not cover defects or damage caused by normal wear & tear, alterations, environmental conditions, or mold.

**How to Obtain Warranty Service:** If you need replacement parts or would like to make a warranty claim, please contact our Customer Service Representative by mail, email, fax or telephone at the address or phone numbers listed on this page. All warranty claims must include the

model number of the product, copy of the original receipt and the nature of the problem. In addition, Trevconn Enterprises may at its discretion authorize the prepaid return of the claimed defective part. Merchandise not pre-approved for return will not be accepted and the associated claim not accepted.


Products should be examined for defects prior to installation. This warranty also does not cover labor charges for installation or removal of the product or any associated products. If upon inspection you find our product has a damaged or missing part, please contact Trevconn Enterprises customer service to obtain a replacement part.

Warranty Contact Information:

Email: warranty@trevconn.com  
 Fax: (805) 754-3738  
 Telephone: (805) 754-2371 Extension #4  
 Mail: Trevconn Enterprises  
 1597 Corte Del Rey  
 Thousand Oaks, CA 91360

Pre-Installation

**Read Installation Guide & Watch Online Video:** Trevconn Enterprises recommends you read this entire installation guide prior to beginning the installation. Watch the online video: [www.trevconn.com/videos](http://www.trevconn.com/videos)


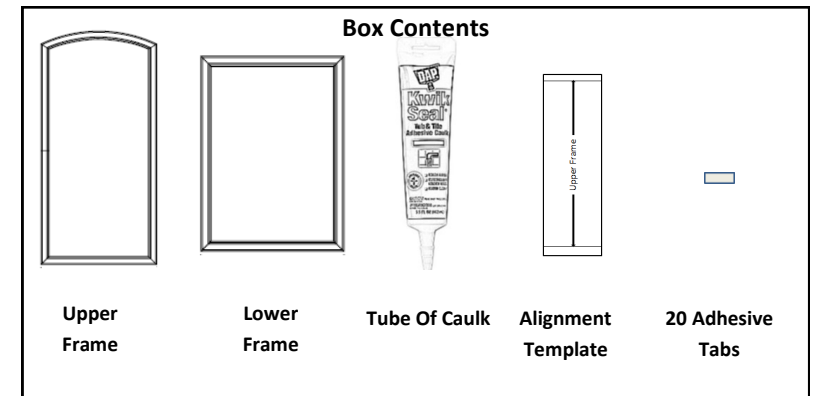


Installation Instructions On Reverse Page

Installation


1. Remove the EZ-Door Frames and verify all of the box contents are included. Wipe clean door surface.

2. Unfold the Alignment Template and align it with the outside edge of the door making sure the side marked "Top" is aligned with the top edge of the door and one side edge of the template is aligned with the vertical edge of the door. **(Hint: You many have to open the door to achieve alignment with the door edge due to molding and trim which may block access.)** Press down on the top and bottom of the Template so that it adheres to the door.

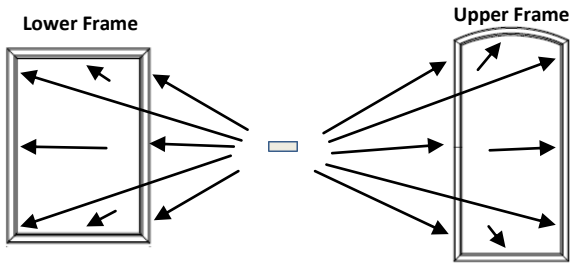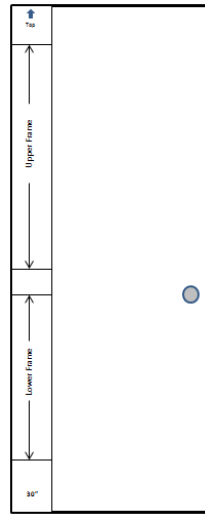


3. Remove one side of the paper backing from the double sided adhesive tab and firmly affix the tabs to the lower and upper frames in the areas shown above. The tabs must be adhered to the flat surface which is the approximate size of the tab. **(Note: There are 16 tab adhesion points, 4 extra tabs are provided for your convenience.)**


4. Remove the remaining side of the paper backing from the Lower Frame and align the frame along the inside edge of the Alignment Template. Adjust the frame vertically such that it is between the lines on the template. Firmly press around the edges of the frame where the adhesive tabs are located to adhere to the door.

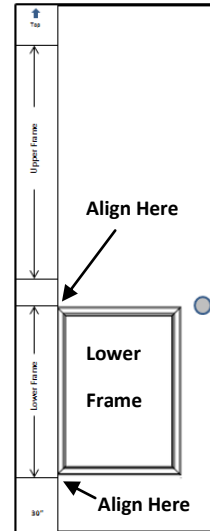

5. Remove the remaining side of the paper backing from the Upper Frame and align the frame along the inside edge of the Alignment Template. Adjust the frame vertically such that it is between the lines on the template. Firmly press around the edges of the frame where the adhesive tabs are located to adhere to the door.

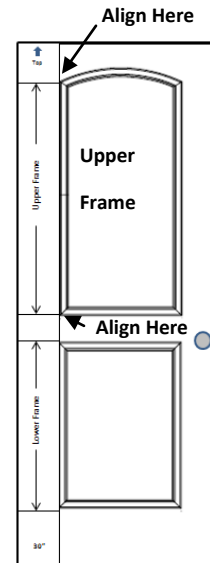

6. Using the caulk provided completely caulk the inside and outside edges of the frames where they meet the door surface. **(Hint: Use the caulk sparingly and smooth to a neat appearance.)** Let caulk cure for at least two hours prior to painting the door.

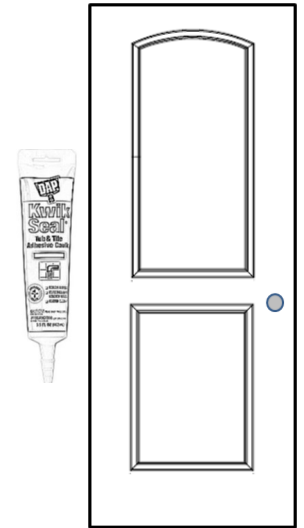

6. Clean surface of door, paint the desired color using a latex based paint. **(Note: Not all oil base paints will adhere to EZ-Door's Frames. Check with your paint vendor for compatibility)** Enjoy your new modern looking door.