

UTV ENCLOSURE FOR KAWASAKI® 610 UTVS



⚠ WARNING

This Enclosure will NOT protect against noise, engine exhaust, chemicals, collision, roll-over or other accidents.

⚠ WARNING

When your UTV is at idle with your Enclosure installed, make sure to open a side door to ensure proper ventilation against carbon monoxide.


⚠ WARNING

Operating a UTV with this Enclosure will restrict your field of vision.

⚠ WARNING

Usage of this Enclosure DOES NOT negate the necessity of wearing a helmet.

INSTALLATION



Apply the adhesive-backed Rip-and-Grip strips to front, outside of the front roll bars, 5 per side, spaced evenly (Fig. 01). Press firmly and allow 24 hours for adhesive strips to cure.

Unzip the doors and remove from the enclosure.

Loosely drape the enclosure over UTV with the Front label facing toward the front of the UTV. Be careful the metal clips do not strike the UTV. Pull enclosure toward the front to provide enough slack to attach the front corner attachment clips. Attach the clips (A) at both front corners by hooking the short arm on the back of the front roll cage bar terminal, and holding firmly, rotate the clip toward the front. Apply light pressure and click into place.


Starting at the clips, pull cover up and attach to Rip-and-Grip strips on front roll cage. Make sure cover is centered on the roll cage.

Continue pulling the enclosure over the top and down the back of your UTV.

Connect the back Vertical straps and Horizontal straps (B). Inside the roof, attach the inside tension straps by wrapping the straps around the roll cage bars from front to back. Pull tight.

Pull down at the bottom of the doors and fenders to determine where the doors and fender adhesive Rip-and-Grip will go. It is not necessary to use all the Rip-and-Grip strips. You may want to use just 6" approx. at the bottom of the front fenders (C).

Re-attach doors.

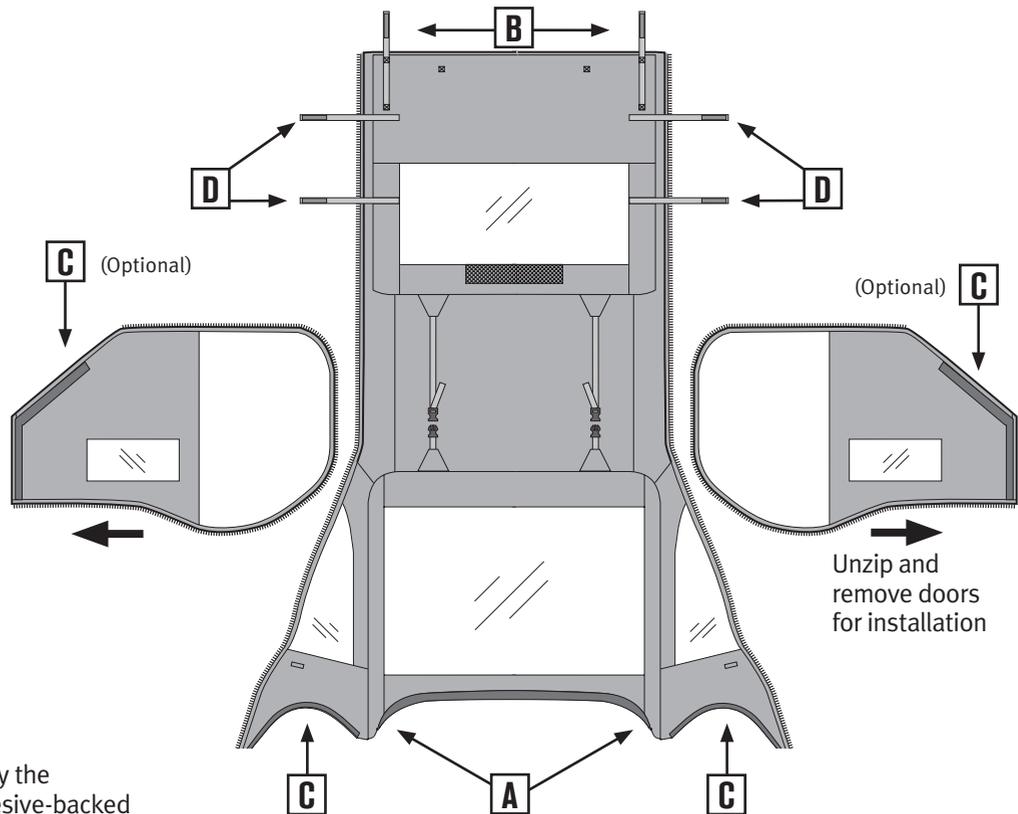

When Rolling doors up: Loop lower door wrap around seat arm, which will pull the rolled up door out of the way of the dump mechanism.

USAGE

The doors of your Enclosure can be rolled sideways out of the way and secured with the attached Rip-and-Grip straps (D). The doors also can be unzipped and removed completely.

CLEANING

Clean your Enclosure with a soft brush and warm water.

DO NOT USE SOAP as it can damage the protective coatings on the fabric. Air dry.

STORAGE

To avoid mildew be sure that your Enclosure is completely dry before you store it for an extended period in an enclosed area.

WARRANTY

Your Enclosure is factory warranted for workmanship and materials for two years after purchase.



Classic Accessories, Inc.
Kent, WA, USA 98032
www.classicaccessories.com

©2008

73067, 73063 08c0A58 _ 10245