

Insulation Screw with Plate

DESCRIPTION

GenTite Insulation Screw with Plate can be used in many GenTite Roofing systems for attachment of insulations to steel, wood, and other approved decks. GenTite Insulation Screw with Plate is manufactured to conform to the physical property requirements of Factory Mutual Specification #4470.


INSTALLATION

GenTite Insulation Screw with Plate should be positioned over the approved insulation and installed per Gentite Application Instructions.

The following fastening pattern should be used to achieve the desired fastening rate.

Recommended Fastener Penetration into Deck

Steel Deck – Minimum of 3/4" (19.1 mm) required penetration Wood Deck – Minimum of 1" (25.4 mm) required penetration

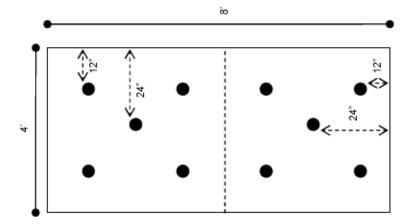

Metric Conversions:
6" = 152.4 mm
12" = 304.8 mm
18" = 457.2 mm
24" = 609.6 mm

Always stagger insulation

size used.

joints, regardless of board

GenTite™ RRS
250 West 96th Street
Indianapolis, IN 46260
800-443-4272 • www.GenTite.com



Insulation Screw with Plate

PRODUCT DATA

SIZE	QUANTITY	PRODUCT #
2 7/8" (73 mm) Fastener		W59GT51238
3 3/4" (95.25 mm) Fastener	100 Each (Fastener and Plate)	W59GT51375
5" (127 mm) Fastener	per Carton	W59GT51500
All with: 3" (76 mm) square Plate		

STORAGE

Screws with Plates should be protected from moisture and kept dry at all times. If stored out of doors, place on skids in a dry area and cover with a breathable tarp.

SHELF LIFE

Not applicable

PRECAUTIONARY DATA

- Refer to Material Safety Data Sheet for additional information.
- Eye protection is recommended when installing the fasteners.

PHYSICAL PROPERTIES

FASTENER PROPERTY	FASTENER MINIMUM PERFORMANCE	
Material	SAE 1022 Heat Treated	
Diameter	#12 Modified Buttress	
Thread	#12 Modified Buttress	
Head Style	#3 Phillips	
Corrosion Coating	SPEX™	
Fastener Point Type	Patented X-Point	
Color	Grey	
PLATE PROPERTY	PLATE MINIMUM PERFORMANCE	
Material	Galvalume <u>®</u>	

GenTite™ RRS 250 West 96th Street Indianapolis, IN 46260 800-443-4272 • www.GenTite.com



Insulation Screw with Plate

Thickness	0.018" - 0.021" (0.4653 mm)
Corrosion Coating	AZ – 55; Exceeds FM 4470 Criteria
Plate Shape	3" (76 mm) Square

LEED INFORMATION

Recycled Content Post Consumer Post Industrial	25% 0%
--	-----------

GenTite™ RRS 250 West 96th Street Indianapolis, IN 46260 800-443-4272 • www.GenTite.com