

5 Piece Roll In Shower: **Elite White** Drain: Center



Made in Tennessee, USA

Model # 6030 BF 5P .75C-WH ELW

Elite White Accessories (page 2)

hansgrohe



German Engineering

Italian Design

Outside Dimensions: 60"L x 31"W x 77.5"H

Truck Load Factor: .80 Load Factor: 2.66 Net Weight: 437 lbs.

Threshold Height: 3/4" Change of Level*

Package Options:

- Standard (no fixtures)
- Deluxe (standard fixtures)
- Elite (premium fixtures in white, brilliant or satin)

Drain Configurations: Right, Left or Center

• With or without integrated molded soap ledges

Panels:

| Shower Base | .36 1/2" x 60" |
|------------------------|--------------------|
| Side Wall Panel Left | .74" x 34 1/4" |
| Side Wall Panel Right | 74" x 34 1/4" |
| Rear Wall Panel Bottom | .54 3/4" x 40 1/2" |
| Rear Wall Panel Top | .54 3/4" x 33 1/2" |

Features:

- Premium marine grade gel-coat, five piece shower with 8" classic tile pattern.
- Plywood and steel reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations).
- Easy shower wall assembly pin-lock system allowing front side installation.
- Precision fit wall panel seams (match into grout pattern).
- Grip-Sure(TM) floor texture.
- Self supporting, pre-leveled shower base (no mud set required).
- Shower door friendly (squared corners allow door installation).
- Ships pre-assembled, heavy duty crating protects product in transit.

Note

* Change of level threshold has manageable 1/4" vertical rise to easily coordinate with minimum finished flooring.

Accessories:

- [12] Collapsible Rubber Dam White with End Caps
- [14] 2" Chrome Strainer, Brass Drain with Friction Seal
- [15] Kartri 66"x74" Heavy Weighted Shower Curtain

Hansgrohe

- [1] Hand Shower, Chroma E75 3 Jet
- [2] Vinyl Techniflex Hose
- [3] Wall Outlet Elbow in Chrome
- [4] Hand Shower Alternate Wall Mount in Chrome
- [7] HG Focus E Pressure Balance Valve
- [8] Interchangeable iBox Universal Plus

Ponte Giulio

- [5] Concealed Square Flange Straight SS Grab Bars
 (2) 36", 18" Soft and warm to the touch Vinyl White
- [6] Ergonomic Hand Shower Holder ABS White
- [9] 4"x16" Folding Seat, Stainless Steel Support, ABS White 380lb cap.
- [10] Folding Wall Grab Bar, Elbow Support 18" Polyethylene White
- [11] Shower Curtain Rail Vinyl Coated White
- [13] Rectangular Stainless Steel Soap-Sponge Basket


Codes:

IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA


Warranty:

30 Year Limited Warranty

Roll In Shower **Elite White** Accessories

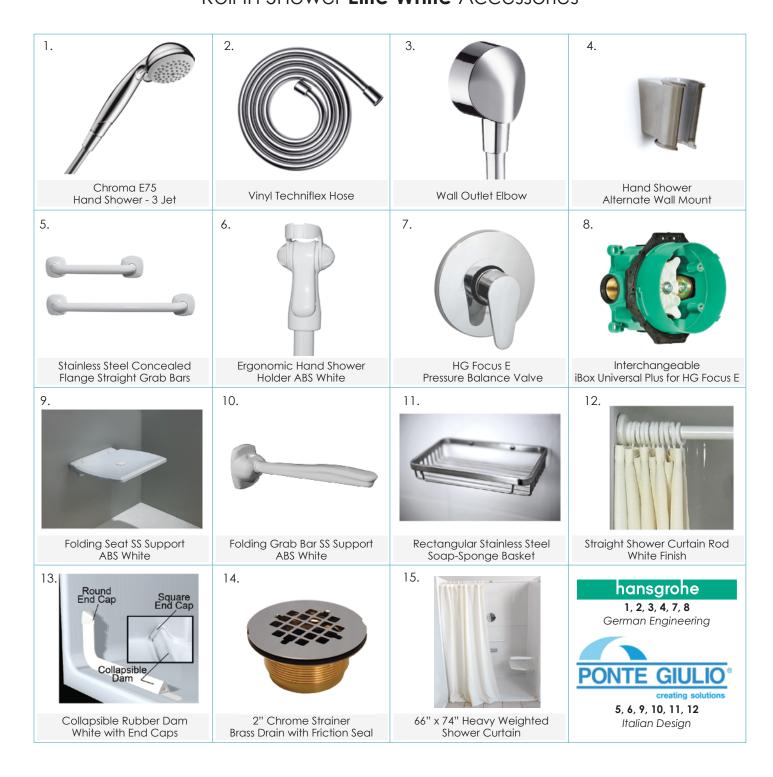

Ella Roll In Shower EB 6030 BF 5P .75 C

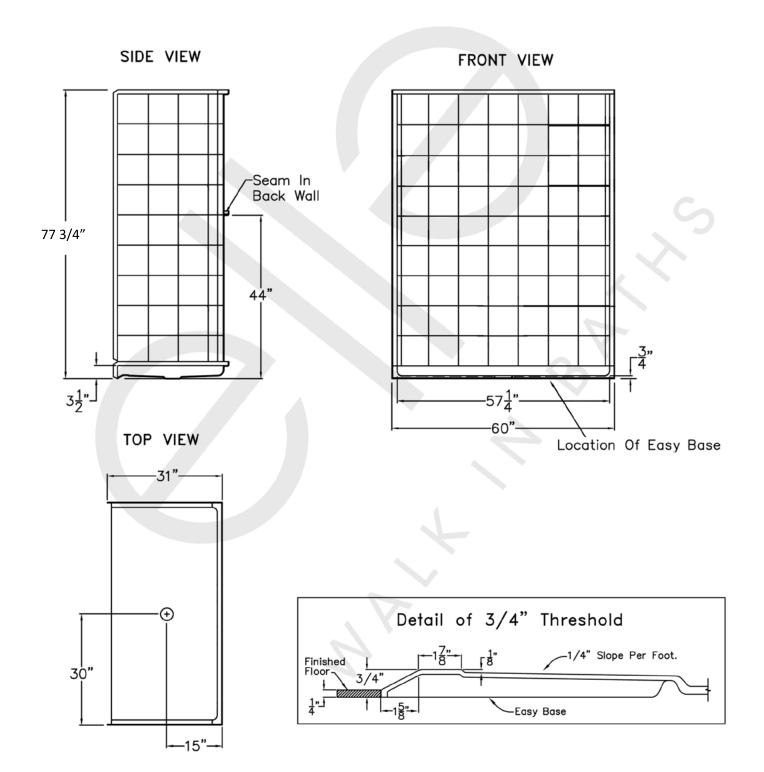



Roll In Shower Features


STRENGTH

Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our

Plywood reinforced core walls and high density base.


competitors.

Metal conduit around perimeter of EACH panel for added strength.



ADAPTABILITY

Customized Accessory Placement




The plywood reinforced core walls allow the fixtures to be installed right onto the wall studs by eliminating the need for a drywall backing.

FRONT SIDE INSTALLATION




INTEGRAL SELF-LOCATING METAL GUIDE PINS



Aluminum Pin and Slot System for a contractor friendly front side installation.

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.



SHOWER DOOR FRIENDLY

Your choice: Curtain or Door



Ella shower construction allow for framed or frameless shower doors to be installed.

Square corners in

Image for Illustration only

SMART PACKING

Multi-piece Shower in a Box



Heavy Duty Crating protects product in transit

Each panel is individually packaged then labeled and banded.

Each package is crated vertically on a pallet.

This process allows for your shower to be delivered safely and un-crated in minutes.

AVAILABILITY

Your Project won't be held up




In stock for Rapid Ship


Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.

Rush orders are available upon request (white only).

No order is too big or small.






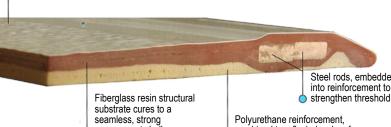

encasement shell

Steel rods, embedded into reinforcement to

Polyurethane reinforcement. machined to a flush, level surface



The barrier free threshold height (C) varies due to shower base sizes and floor drain location. The shower base is designed to assure the correct water flow into the floor drain. The threshold height size is located at the end of each shower model number

Example: EB 6030 BF 5P .75 shows 0.75 of an inch \mathbf{C} = $\frac{3}{4}$ " threshold height.