





Installation: Binding Posts


1. Binding Post pair: Red (positive +), Black (negative -).

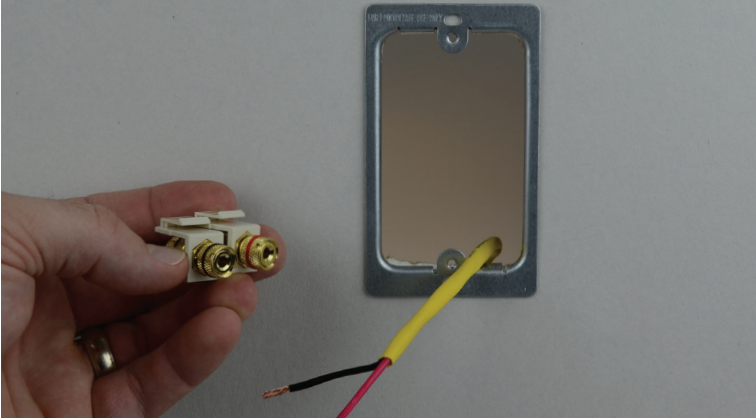


2. Unscrew the rear portion of each binding post.

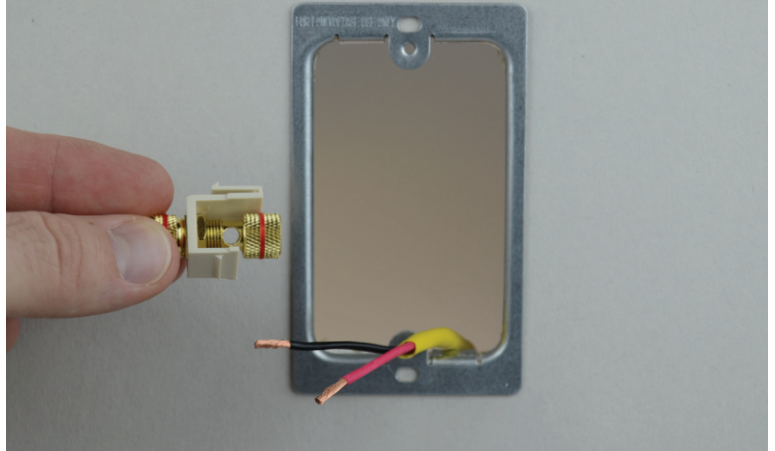

3. Remove about 1/2" of insulation from each speaker wire, then feed through opening on the side of the binding post.

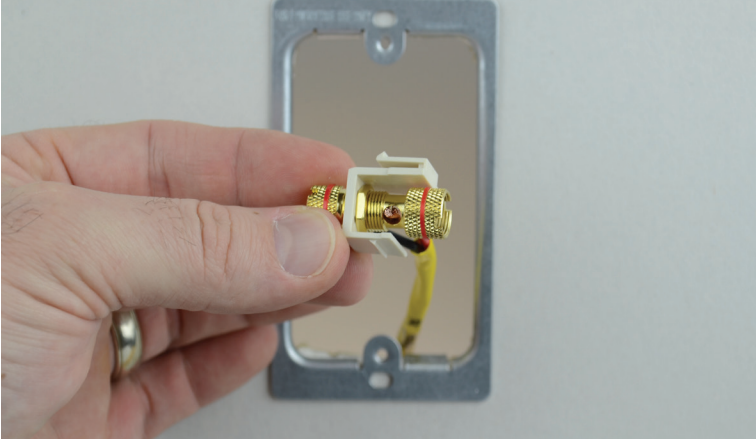

4. Tighten each binding post to secure wires.
NOTE Red is positive (+) and black is negative (-).

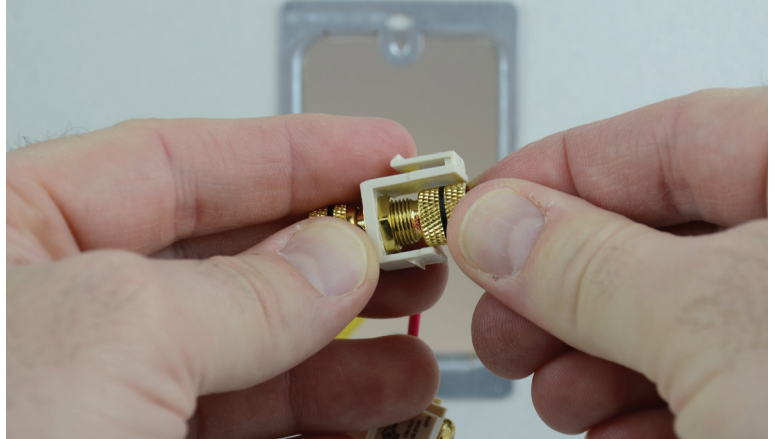

5. Place Binding Post insert at an angle into the keystone port with the tab up. Tilt insert up to lock in place.




6. Install all desired Binding Posts into keystone wall plate.





Installation: Binding Posts (continued)


7. Mount wall plate to low voltage mounting bracket (not included).

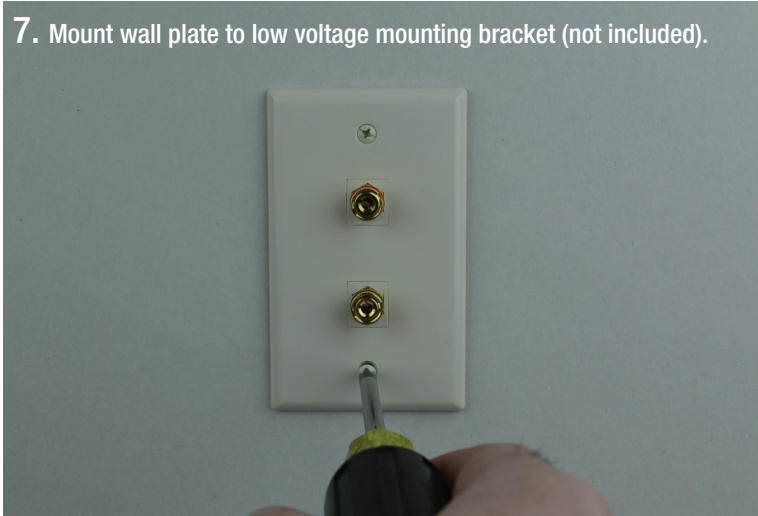


8. Unscrew Binding Posts to expose the front side wire feed through.




9. Remove about 1/2" of insulation from each speaker wire and feed through opening on side of the Binding Post.

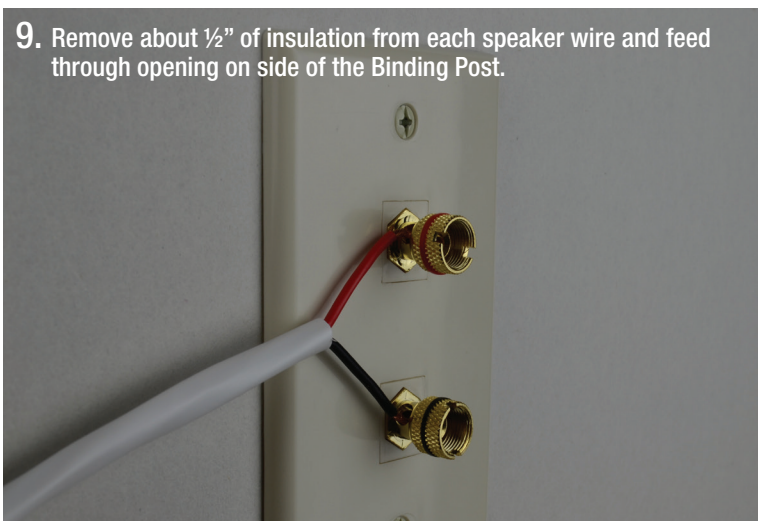

10. Tighten each binding post to secure wires.
NOTE Red is positive (+) and black is negative (-).

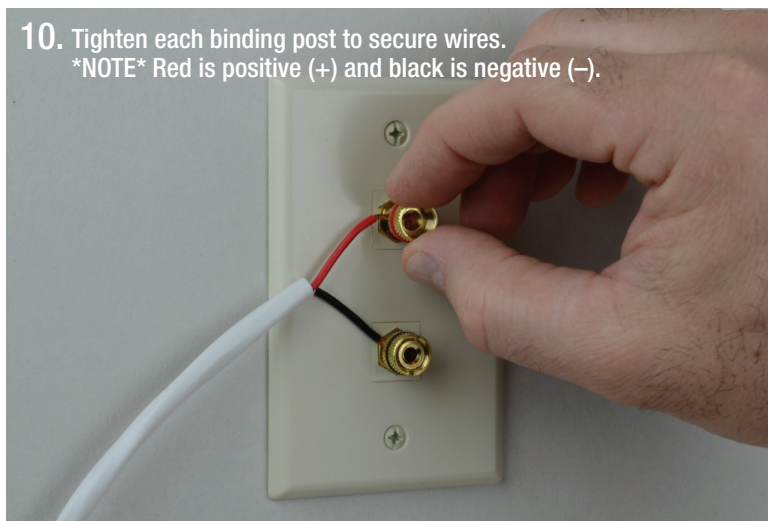

11. The Binding Posts should be tight and speaker wire should *not* be loose.

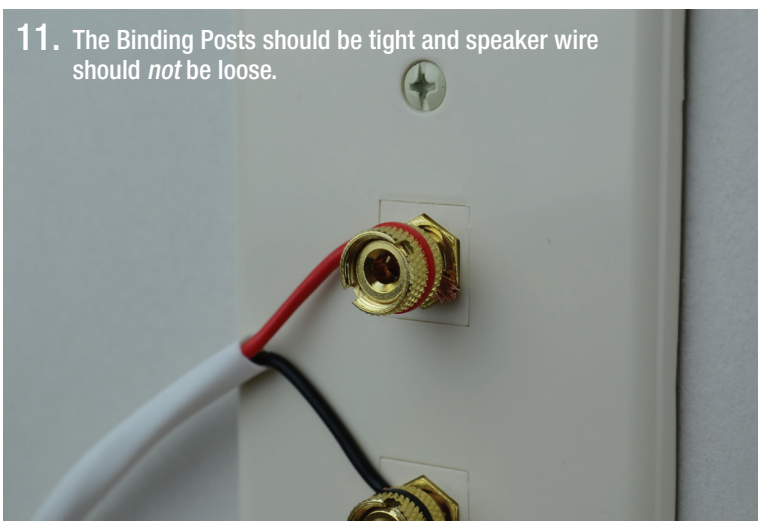

12. Binding Posts are compatible with most standard keystone wall plates; they are also compatible with most banana plugs.

