



RainPerfect™

SOLAR-POWERED RAIN BARREL PUMP SYSTEM

The RainPerfect™ pump and solar panel install easily and provide plenty of pressure to run water through a garden hose.

The pump provides enough pressure to run most low pressure sprinklers, wash a car or water just about anything around your home. A convenient solar panel captures natural energy from the sun eliminating the need for electrical power to charge the battery. This makes the RainPerfect™ pump ready to go anywhere, anytime and involves no additional utility cost for you.

The RainPerfect™ pump has many convenient features


- Backed by the Rule brand of DC pumps, a brand enjoying over 45 years of operational excellence
- Harsh environment DC motor technology, proven with over 15 million units in use
- Robust and innovative centrifugal pump design, providing pressurized pumping at 13 psi (0.9 bar)
- Incorporation of solar rechargeable, NiMH battery system, pumping up to 100 gallons (378 litres) of water on a single charge
- Standardized garden fixtures, ensuring compatibility with all major hose brands
- Simple screw and mount installation, allowing easy fixturing with minimal tools



rule
Innovation
a xylem brand

RainPerfect™ SOLAR-POWERED RAIN BARREL PUMP SYSTEM

The RainPerfect™ Pump System Includes

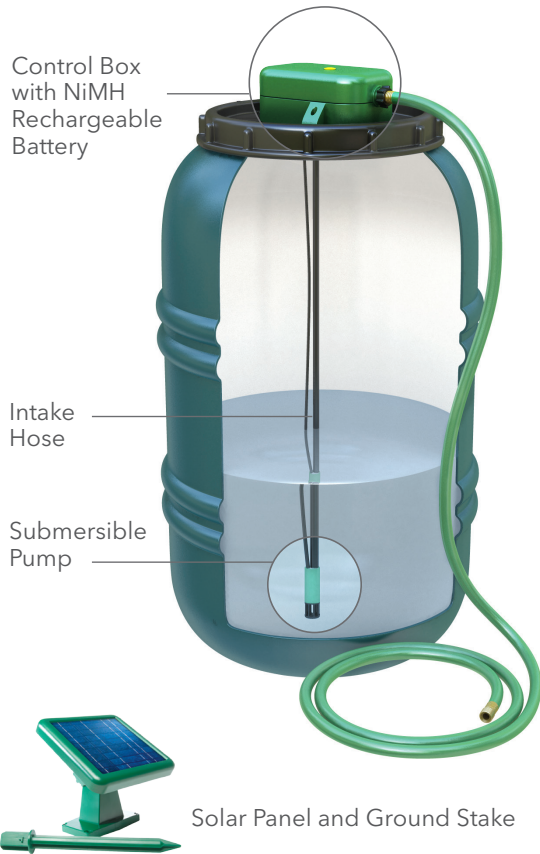

Pump Specifications

Gallons (water) per charge	Approximately 100 gallons (378 liters)
Maximum Pressure	13 psi
Charge Time	Approximately 8 hours of sun
Voltage	12 volt
Certifications	CE
Port Size Outlet	Standard garden hose

Packaging Specifications

Weight	6.5lbs
Dimensions	12.625" L x 6.25" W x 21" H
Master Pack Size	4 units
Master Pack Weight	26lbs
Master Pack Dimensions	15.625" L x 25.25" W x 13.375" H

3.5 Watt Solar Panel with Ground Stake

- Provides power to internal NiMH rechargeable battery
- Can mount on the rain barrel, fence or wall, or in the ground with the ground stake
- Kit contains 15ft of wire to allow for convenient placement



Model No. RB280-100



Warranty: All products of the company are sold and all services of the company are offered subject to the company's warranty and terms and conditions of sale, copies of which will be furnished upon request. The information provided herein is for guidance only, it does not constitute a guarantee of the performance or specification of any individual product or component.

www.xylem.com

USA
Xylem, Inc.
Cape Ann Industrial Park
Gloucester, MA 01930
Tel: (978) 281-0440
Fax: (978) 283-2619

UK
Xylem, Inc.
Bingley Road, Hoddesdon
Hertfordshire EN11 0BU
Tel: +44 (0) 1992 450145
Fax: +44 (0) 1992 467132

GERMANY
Xylem, Inc.
Oststrasse 28
22844 Norderstedt
Tel: +49-40-53 53 73-0
Fax: +49-40-53 53 73-11

JAPAN
NHK Jabsco Company Ltd.
3-21-10, Shin-Yokohama
Kohoku-Ku, Yokohama, 222-0033
Tel: +81-045-475-8906
Fax: +81-045-477-1162

ITALY
Xylem, Inc.
Via Tommaseo, 6
20059 Vimercate, Milano
Tel: +39 039 685 2323
Fax: +39 039 666 307