

This heavy-duty wide crown roofing stapler is capable of handling a variety of applications. Constructed of durable, high-quality, high-strength materials, the WC150RXP is designed for extreme performance and long life.



Specifications

Item#	4X0001N
Contact actuation trigger	
Reg. Operating Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 cycles per min.)	3.18 scfm
Air Inlet	3/8" NPT
Tool Weight	5.5 lbs (2.5 kg)
Height	9" (229 mm)
Length	15.25" (387 mm)
Width	4" (105 mm)
Fastener Capacity	160

Fastener Specifications



Gauge	.16
Crown	1"
Fastener Range	5/8" - 1 1/2" (16 mm - 38 mm)
Finish	Galvanized
Collation	Straight glued taped strip

Applications

Asphalt and fiberglass shingles, roofing felt, carton-to-skid, furniture frames, wire lathing, butt-joints, and foam insulation board.

Features and Benefits

- Five-year limited warranty
- Robust firing valve design makes the tool fast, powerful, efficient, and easy to maintain
- Positive-locking adjustable depth of drive ensures consistently flush drives and helps prevent over-drives.
- Carbide wear plates protect tool from shingle damage
- Aggressively tapered body allows for an improved line of sight for better shot accuracy
- Rotating belt hook makes the tool portable and easily to stow
- EZ clear latch provides easy access to clear fasteners
- High-strength composite magazine and metal magazine guide prevents wear and helps eliminate skipping, jams, and misfires
- Large 3/8" inlet for increased air during high volume usage
- Durable deflector cap for superior impact resistance

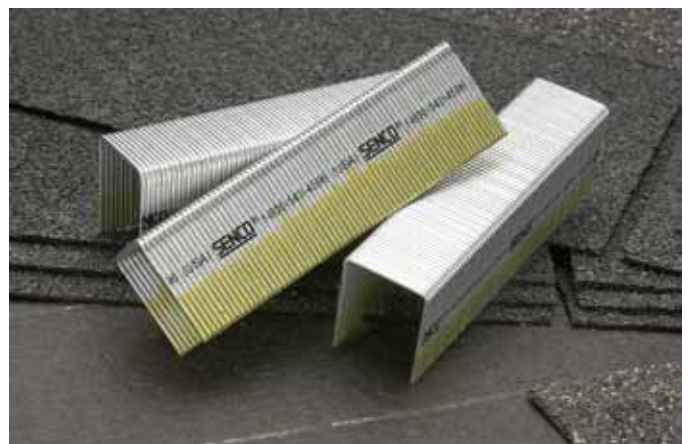



SENCO® 16 Ga. 1" Crown Heavy Wire

Composite roofing, roofing felt, corrugated containers, foam insulation board.

Length	Item Code	Carton Count	Point	Finish	Coating
<u>Galvanized</u>					
5/8	P10BAB	10.M	Chisel	Galv	Sencote
5/8	P10FAB	10.M	Divergent	Galv	Sencote
5/8	P10BPE	10.M	Chisel	Galv	Coated
3/4	P11BAB	10.M	Chisel	Galv	Sencote
3/4	P11BPE	10.M	Chisel	Galv	Coated
7/8	P12BAB	10.M	Chisel	Galv	Sencote
1	P13BAB	10.M	Chisel	Galv	Sencote
1 1/4	P15BAB	10.M	Chisel	Galv	Sencote
1 1/2	P17BAB	10.M	Chisel	Galv	Sencote
5/8	P10BABB	10.M	Chisel	Galv	Sencote
3/4	P11BABB	10.M	Chisel	Galv	Sencote
7/8	P12BABB	10.M	Chisel	Galv	Sencote
1	P13BABB	10.M	Chisel	Galv	Sencote
1 1/4	P15BABB	10.M	Chisel	Galv	Sencote
1 1/2	P17BABB	10.M	Chisel	Galv	Sencote
<u>Stainless</u>					
1	P13BGBN	5.M	Outside Chisel	Stainless	Sencote

Choose the right trigger system for your specific needs!

Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates in the following a sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how Senco will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596 to find your nearest Authorized Senco Dealer, Distributor or visit our web site at: www.senco.com