KOHLER®

Features

- Frameless, 1/4-inch-thick Crystal Clear tempered glass.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Cushioned center guide provides quiet sliding action.
- Vertical blade handles accentuate the contemporary style.
- CleanCoat™ glass treatment repels water for improved ease of cleaning.

Installation

- Sliding bath door.

Components

Additional included component/s: Hardware Kit.

Codes/Standards

ANSI Z97.1 (Tempered Glass)
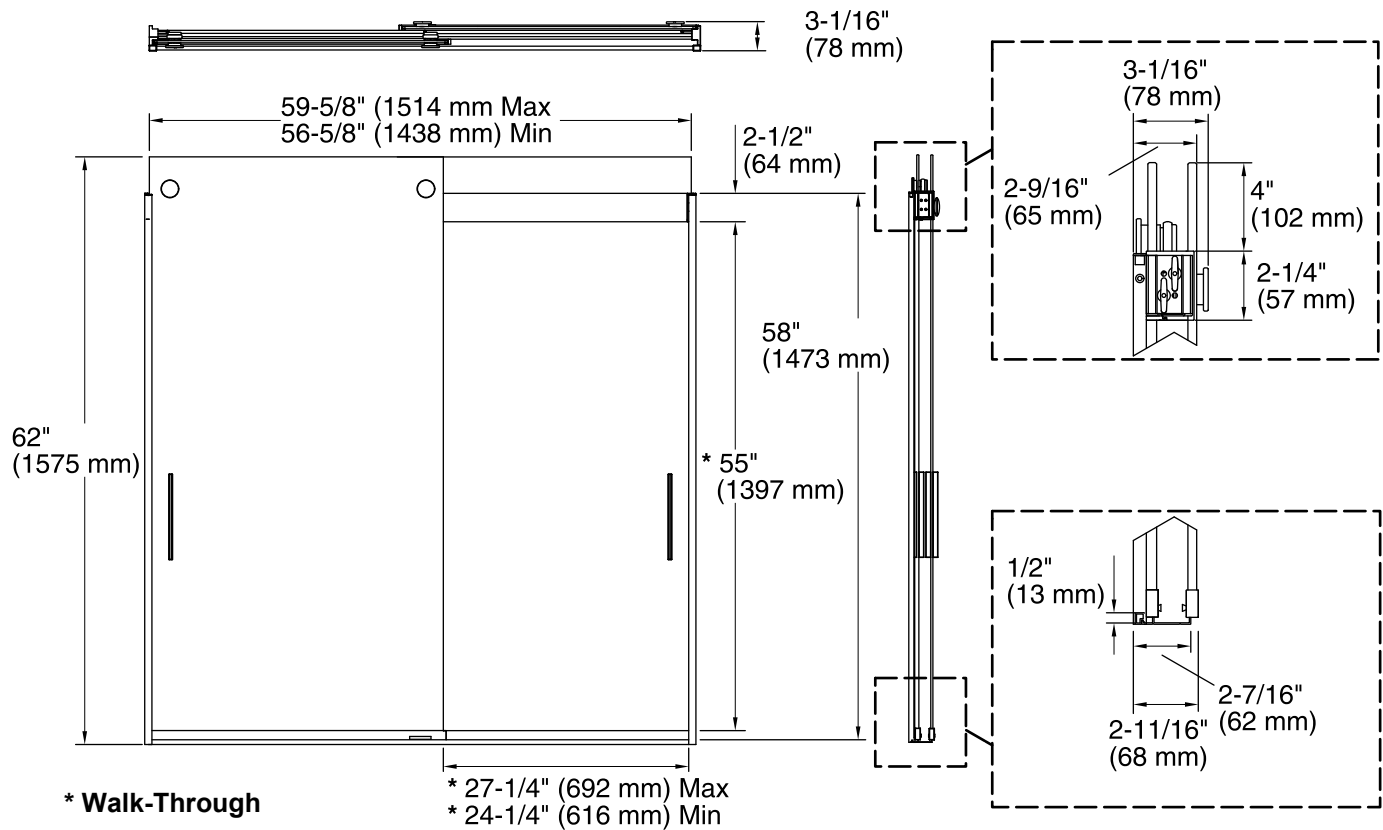CPSC 16CFR 1201 Cat II

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SH	Bright Silver
	MX	Matte Nickel

3-1/16"
(78 mm)

59-5/8" (1514 mm Max
56-5/8" (1438 mm) Min

2-1/2"
(64 mm)

3-1/16"
(78 mm)

2-9/16"
(65 mm)

4"
(102 mm)

2-1/4"
(57 mm)

58"
(1473 mm)

62"
(1575 mm)

* 55"
(1397 mm)

1/2"
(13 mm)

2-7/16"
(62 mm)

2-11/16"
(68 mm)

* Walk-Through

* 27-1/4" (692 mm) Max
* 24-1/4" (616 mm) Min

Technical Information
All product dimensions are nominal.

Frame material:	Aluminum
Opening style:	Sliding/Bypass
Opening Width - Min:	56-5/8" (1438 mm)
Opening Width - Max:	59-5/8" (1514 mm)
Walk-through - Min:	24-1/4" (616 mm)
Walk-through - Max:	27-1/4" (692 mm)
Glass thickness:	1/4" (6 mm)

Notes
Install this product according to the installation guide.

NOTICE: The vertical opening should be a minimum of 62-3/4" (1594 mm) to allow clearance for installing the top track over the wall jambs.