



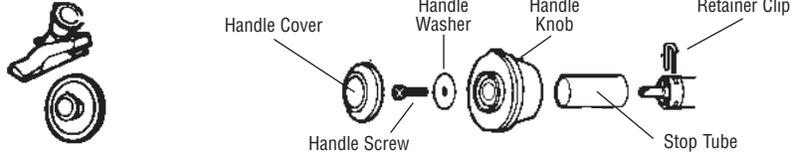
Installation Instructions For
Cartridge for Moen
 Fits "Posi-Temp" Faucets MO-9 Tub & Shower Faucets

Instrucciones para
Cartucho para Llaves de Moen
 Para Grifos Tina y Ducha MO-9 "Posi-Temp" Moen

Tools Required: Standard Screwdriver, Pliers, Phillips Screwdriver

If your faucet looks like this...

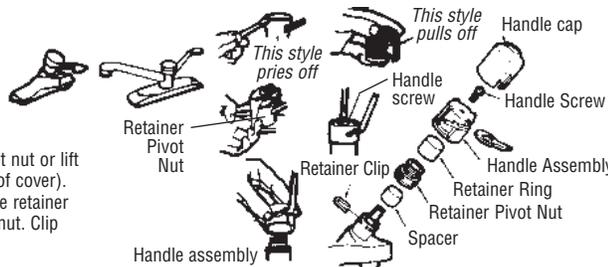
1. Turn off water supply.
2. Pry handle cover off.
3. Unscrew handle screw and remove handle knob, handle parts and stop tube.
4. Pull out retainer clip with pliers.




If your faucet looks like this...

1. Turn off water supply.
2. Pry handle cover off.
3. Lever must be in off position to remove. Unscrew handle screw and remove handle assembly with a lifting, tilting motion.
4. With pliers fully open, remove retainer pivot nut or lift off retainer ring (method depends on type of cover).

Note: On lavatory faucets with lever handles, the retainer clip must be removed before the retainer pivot nut. Clip should be pushed up and out.






To Install New Cartridge

1. Pull stem of new cartridge to open position. Insert cartridge into faucet body by pushing on cartridge ears (if water appears around stem when cartridge is inserted, this is not a leak and is normal).

2. Align the cartridge ears with the slots in the faucet body. Insert clip through the faucet body slots, straddling the cartridge ears and into opposite faucet body slot.

3. On lever handle faucets, the notched flat on the cartridge stem should be pointed toward sink. On knob handle faucets and shower controls, the notched flat should be pointed away from sink or up.

4. Push in retainer clip (A), thru faucet body slot (B), straddle cartridge ears (C), into opposite faucet body slot (D). For knob handle faucets reverse procedures.
5. For lever handle faucets, be sure the notched flat on the cartridge stem is still pointed toward sink, and then push stem into closed position (E). Replace retainer nut (F). Tighten retainer nut with pliers.
6. Holding handle lever up and pointing handle lever toward sink, hook back of handle ring (G) into grooved sleeve (H). Lower handle assembly toward you, rocking it back



7. Replace handle screw, tighten securely and replace handle cap.

Testing New Cartridge

Point faucet spout into sink and *slowly* turn on water supplies. Operate lever or knob (left for hot, right for cold). If flow is low, remove and clean aerator. If faucet or shower control operates properly stop here; installation is complete. If hot and cold positions are reversed, remove handle only. **Do not remove retainer clip.** Turn stem flat 180° (1/2 turn). Re-install handle and re-test faucet.

