

**Precautions**


- Do not install this product outside or at a place where it is exposed to direct sunlight or freezing temperature.
- Install this product at a place where it is easy to access and maintain.
- Avoid collision, freezing, overheating and corrosive chemicals.

**Installation**

- To suit different plumbing sizes, the unit comes with 2 types of threads: 1-inch MNPT and 3/4-inch FNPT. Please choose the correct fittings that fit your plumbing.
- Optionally, the 1-inch MNPT can be directly mounted onto the 1-inch FNPT inlet port of whole house water filters such as iSpring WGB32B.
- The unit is usually installed before other water filters, to protect them from rough sediments such sand and rust, or to be used with Siliphos to protect the water heater.
- For easy maintenance, it is recommended that you install an inlet valve and an outlet valve before and after the unit.

**Maintenance**

- To ensure filter performance, the unit should be flushed at least once a week. Connect a garden hose to the flush valve, turn off the outlet valve, turn on the inlet valve and then the flush valve.
- Observe the stainless steel mesh once a month, twist off the clear housing and clean the mesh when necessary. Vinegar can be used to help remove the mineral deposit.
- Replace the mesh every 12 to 24 months.
- Replenish Siliphos every 3 months or depending on usage.

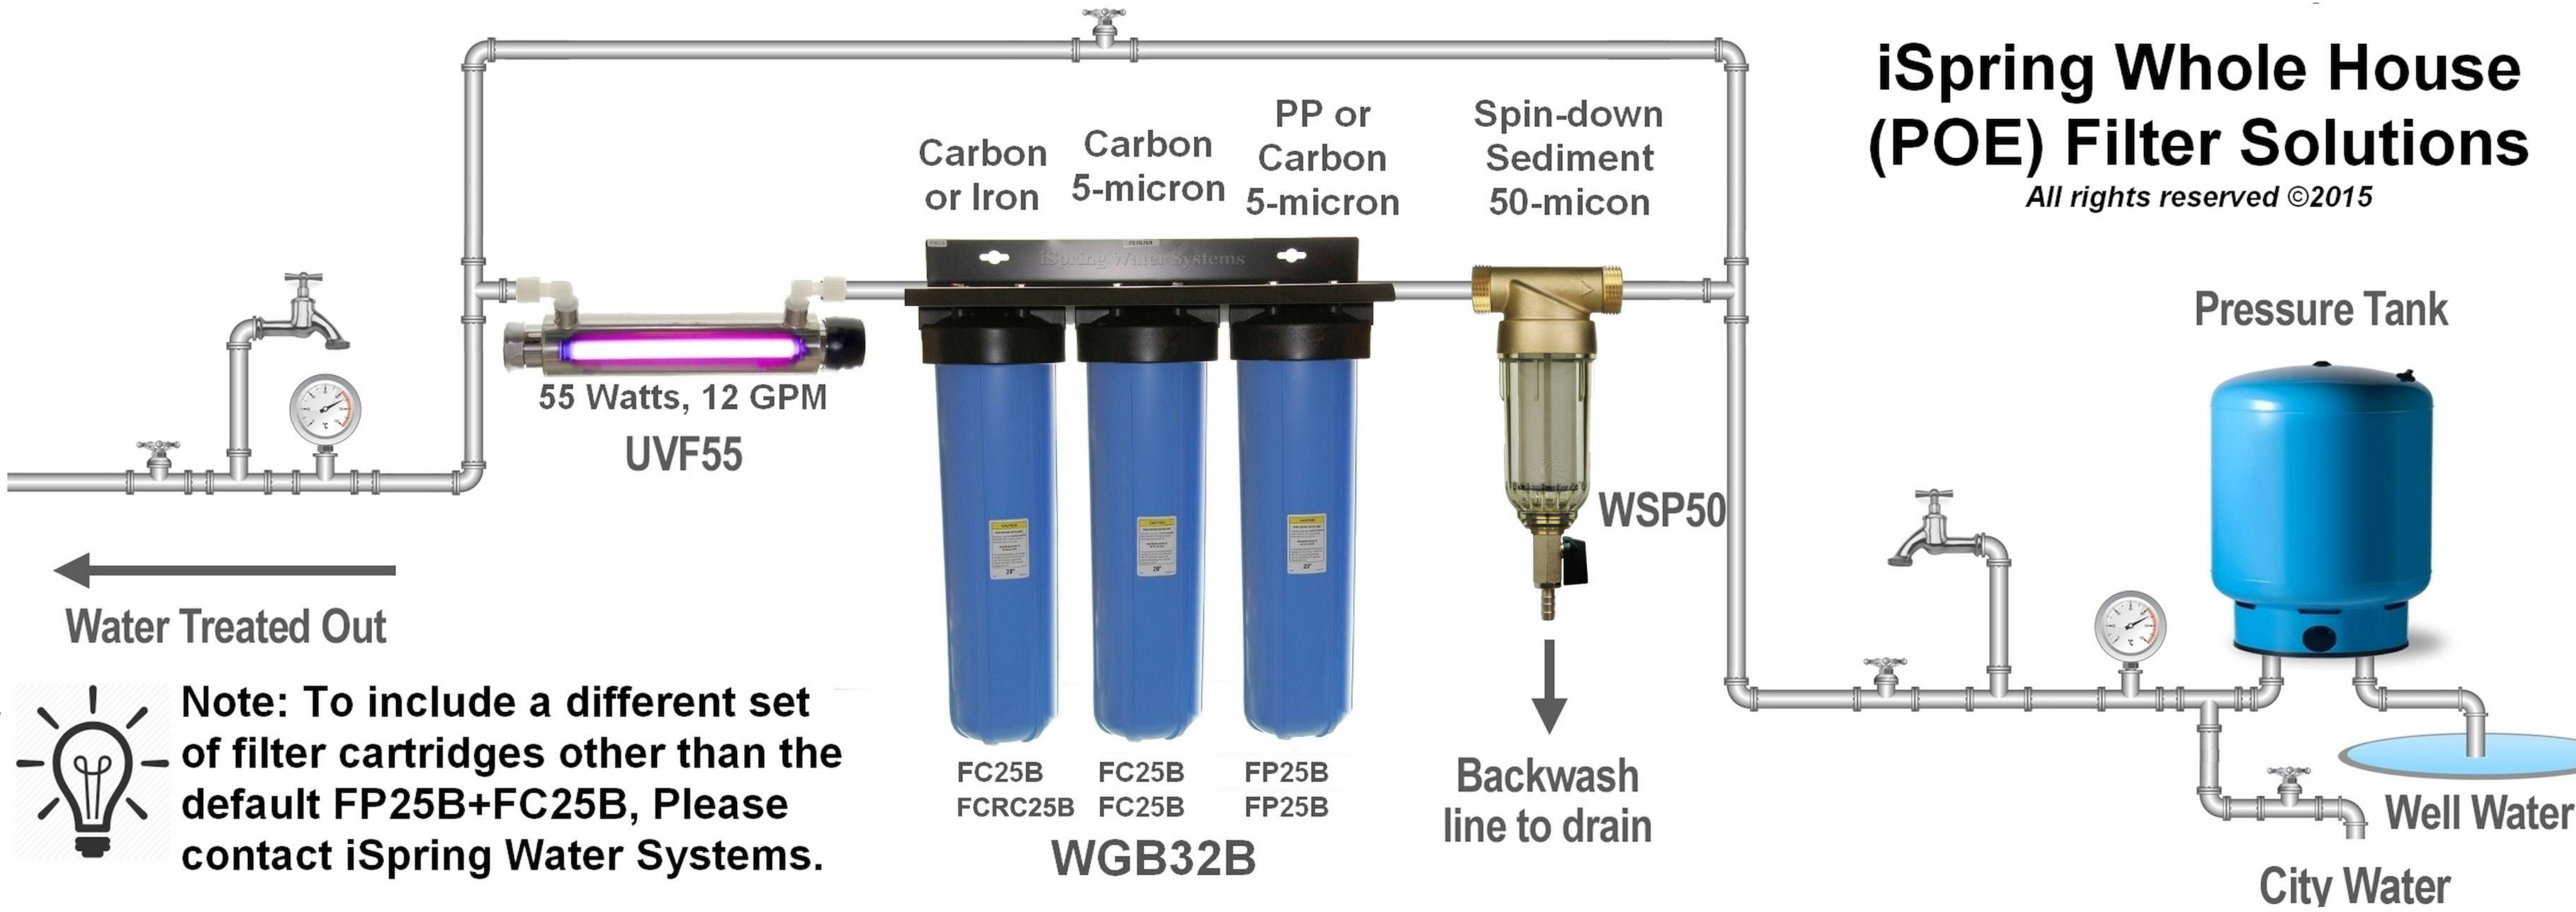

**WSP50P Water Heater Protector Scale Prohibitor**

WSP50P comes with Siliphos for the filter cartridge. Siliphos is an economically effective high-tech product for preventing scale and corrosion in your water supply. With the added Scale Prohibitor being installed at the inlet pipe to the water heater, it can prevent scale from building up in the water heater and water pipe.

