


DO-IT-YOURSELF

Driveway Gate Kit Planning Guide

1. Select your style (single and dual driveway gates available in 10', 12', 14', 16' lengths).

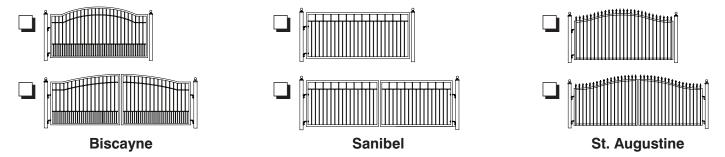



2. Select gate size to match your driveway.

- a) Measure your driveway and refer to the chart below (and on reverse) to select the appropriate driveway gate.
- b) "Distance Between Center of Gate Posts" includes clearance for the gate hinge (approximately 4" per hinge), gate leading edge (approximately 2"), and an additional 2" of space on both sides of the driveway to accommodate gate posts.
- c) The Mighty Mule EZ Gate is designed to be a minimum of 4" from the bottom of the gate to the highest crowning point on the driveway or curb.
- d) Gate height is approximately 5' at the post.
- e) Please view the Gate Installation Manual online for detailed information about planning the gate layout: http://www.mightymulegates.com/pdf/drivewaymanual.pdf


Driveway Width	SINGLE Gate Kit	Distance Between Center of Gate Posts		
		Biscayne	Sanibel	St. Augustine
Up to 9' 6" (114")	10' (120")	10' 9" (129")	10' 9" (129")	10' 6" (126")
9' 7" – 11' 9" (115"–141")	12' (144")	12' 9" (153")	12' 9" (153")	12' 9" (153")

Note: more driveway/dual gate dimensions on reverse

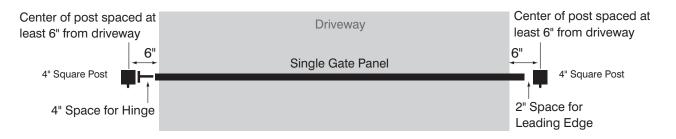

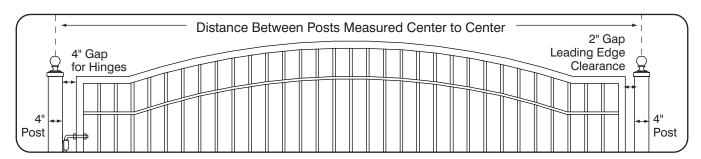

Driveway Width	DUAL Gate Kit	Distance Between Center of Gate Posts		
		Biscayne	Sanibel	St. Augustine
Up to 11' 6" (138")	12' (144")	13' 1" (157")	13' 1" (157")	12' 6" (150")
11' 7" - 13' 11" (139"-167")	14' (168")	15' 1" (181")	15' 1" (181")	14' 11" (179")
13' 11" – 16' 1" (167"–193")	16' (192")	17' 1" (205")	17' 1" (205")	17' 3" (207")

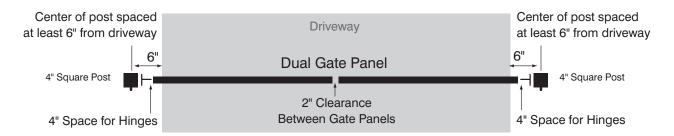



3. Order your gate.

See any store associate to order your Mighty Mule E-Z Gate and have it delivered directly to your home anywhere within the continental US (excluding AK and HI) via a lift gate truck. Standard shipping lead times are 7–21 days from the date of the order. The customer will be contacted approximately 1–3 days in advance by the freight carrier to schedule delivery, so contact phone numbers (cell/home/work) must be provided when placing the order. The customer must be present to accept and sign for delivery of gate.

Biscayne Model	Sanibel Model	St. Augustine Model	
☐ 10' singleG1710-KIT	10' single G1610-KIT	☐ 10' single G1510-KIT	
☐ 12' singleG1712-KIT	12' single G1612-KIT	☐ 12' single G1512-KIT	
12' dualG2712-KIT	12' dual G2612-KIT	🗖 12' dual G2512-KIT	
14' dualG2714-KIT	14' dual G2614-KIT	🗖 14' dual G2514-KIT	
16' dualG2716-KIT	16' dual G2616-KIT	🗖 16' dual G2516-KIT	

Approximate Weights for Shipping and Installation

Ball capped finished hinged post: 100 lbs; Ball capped finished passive post: 80 lbs.

Driveway gate weight per leaf (approximately)						
	10'	12'	14'	16'		
Biscayne Single	150 lbs.	180 lbs.				
Biscayne Dual		100 lbs.	120 lbs.	140 lbs.		
Sanibel Single	130 lbs.	156 lbs.				
Sanibel Dual		85 lbs.	100 lbs	115 lbs.		
St. Augustine Single	142 lbs.	170 lbs.				
St. Augustine Dual		96 lbs.	113 lbs.	124 lbs.		

Items Needed for Installation Checklist

- Box beam level
- ☐ Hoe to mix concrete
- 2 stakes
- □ Mallet
- Water bucket
- Post hole digger
- □ Tape measure
- 10 (or more) bags quick-set concrete
- ☐ Can of spray paint
- □ Shovel
- Wrenches
- □ String line
- □ Line level
- Wheelbarrow
- Grease gun

Note: The Mighty Mule E-Z Gate Opener Attachment Bracket (G3210) is recommended when attaching an automatic gate opener to your driveway gate (see Mighty Mule Automatic Gate Openers).